
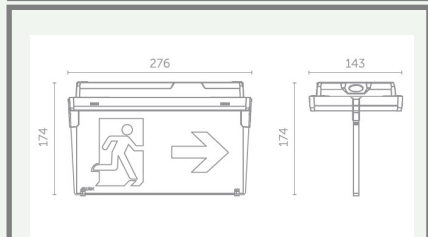


EMERGENCY ESCAPE LIGHTING EXIT M SIGNS

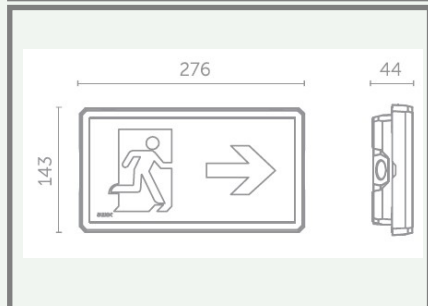

Materials

Body	White, grey or black polycarbonate body
Cover	Transparent or opal polycarbonate

Power Supply

Self contained	220-240VAC/50-60HZ
Central battery	220-240VAC /50-60Hz ; 176-275VDC
Central battery	FZLV-24VDC
Central battery	FZLV II-48VDC

Autonomy and Batteries

Standard	1h or 3h, Ni-cd 3.6v batteries
Premium	1h or 3h, LiFePO ₄ 6.4V batteries

Options

SE	Non maintained
SA	Maintained
PT	Manual test button
AT	autotest
RU	Rubic UNA central monitoring
RW	Rubic UNA wireless central monitoring
CB	Central battery
FZLV	Central battery FZLV 24VDC
FZLV2	Central battery FZLV II 48VDC

Light source

LED	1w, 2w
------------	--------

Mounting

surface	Wall, ceiling
Optionally recessed	Wall, ceiling
Optionally Pendant	ceiling

Charging

Standard	Max. 24h
Premium	Max. 12h ; energy-saving electronic charger

Ambient temperature	0° - 40°
----------------------------	----------

IP Rating	IP65, IK8
------------------	-----------

Insulation Class	II or III
-------------------------	-----------

Dimensions(mm)	276x143x44
-----------------------	------------

Recessing Cut	125x260
----------------------	---------

Viewing distance	25 m
-------------------------	------

Viewing method	Singel side or double-sided
-----------------------	-----------------------------

Additional information

LED indicator signalizes mains powers supply and battery charging

Deep discharge protection

Optional adaptation of the fixture for low temperatures up to -25°c with HTR 25

III class of insulation of FZLV and FZLV2 version

EMERGENCY ESCAPE LIGHTING EXIT M SIGNS

SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS			COLOR			COVER	
STANDARD	ETE	1W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP
		2W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP
PREMIUM	ETE	1W	B	1	3	SE	SA	AT	RU	RW	WH	GR	BL	TR	OP
		2W	B	1	3	SE	SA	AT	RU	RW	WH	GR	BL	TR	OP

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

	CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR			COVER	
ETE	1W	F	CB	CBS	X	WH	GR	BL	TR	OP	
	2W	F	CB	CBS	X	WH	GR	BL	TR	OP	

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

	CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR			COVER	
ETE	1W	Z	CB	ADE	ADP	WH	GR	BL	TR	OP	
	2W	Z	CB	ADE	ADP	WH	GR	BL	TR	OP	

FZLV SYSTEM CONFIGURATION

	CODE	POWER	SYSTEM		COLOR			COVER	
ETE	1W	FZLV	FZLV2	WH	GR	BL	TR	OP	
	2W	FZLV	FZLV2	WH	GR	BL	TR	OP	

LEGEND:

ETE	fixture EXIT M
E, C	electronic gear for STANDARD self-contained fittings
B	electronic gear for PREMIUM self-contained fittings
F	electronic gear for central battery fittings
Z	electronic gear for addressable central battery fittings
SE	non maintained
SA	maintained
PT	manual test button
X	fitting without additional options
AT	autotest
RU	Rubic UNA central monitoring
RW	Rubic UNA Wireless central monitoring
FZLV	central battery FZLV 24 VDC
FZLV2	central battery FZLV II 48 VDC
CB	central battery version
CBS	central battery for circuit monitoring
ADP	address module for CBS 1.0 – SMART technology
ADE	address module for CBS 2.0 – SMART technology
WH	white color
GR	grey color
BL	black color
TR	transparent polycarbonate cover
OP	opal polycarbonate cover