


PICO

EE-PIC7



7W

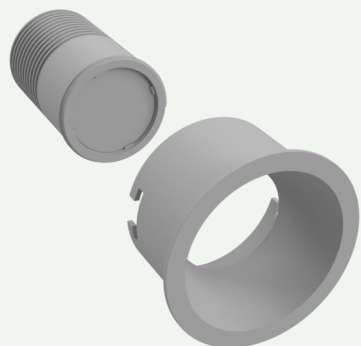

2700K/
3000K



540-560lm



15°/25°/40°



dimmable
TRIAC

TECHNICAL FEATURES


| | |
|-----------------|----------------------|
| Power | 7W |
| Input current | 100-240 Vac |
| Dimmable | Triac, optional Dali |
| IP rating | 40 |
| Max. amb. Temp. | 45°C |


LIGHTING CHARACTERISTICS

| | |
|--------------|----------------------------------|
| Light color | 2700/3000 K |
| Beam angle | 15°/25°/40° |
| CRI | RA90+ |
| Lumen output | 2700 K: 540 lm 3000 K: 560 lm |
| LEDtype | CREE |

MEASUREMENTS AND MATERIAL FEATURES

| | |
|--------------|-------------|
| Measurements | 81 x 60 mm |
| Material | aluminium |
| Color | black/white |

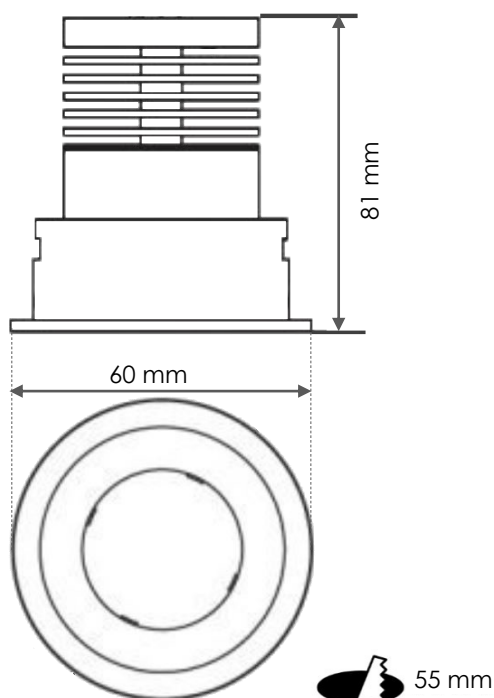

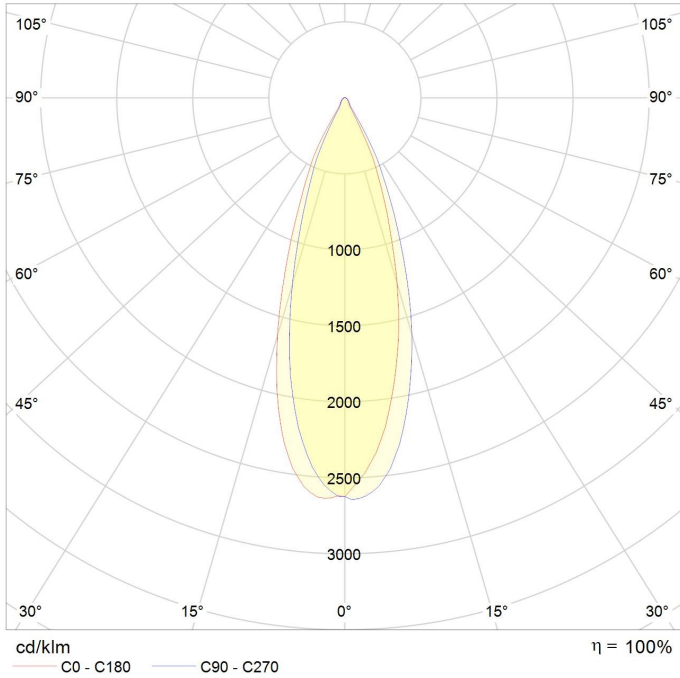

PIC07 - 25° beam angle

| PRODUCTTYPE | POWER | LIGHT COLOR | BEAM ANGLE | COLOR |
|-------------|--------|-------------|------------|-------------|
| EE- PIC | 7 / 27 | - 25 | B | |
| PICO | WATT | KELVIN | ° | BLACK/WHITE |

| | |
|---------------------|----------------------------------|
| EE-PIC7/27-15W | Pico 7W 2700°K, 15°, Wit |
| EE-PIC7/27-25W | Pico 7W 2700°K, 25°, Wit |
| EE-PIC7/27-40W | Pico 7W 2700°K, 40°, Wit |
| EE-PIC7/27-15B | Pico 7W 2700°K, 15°, Zwart |
| EE-PIC7/27-25B | Pico 7W 2700°K, 25°, Zwart |
| EE-PIC7/27-40B | Pico 7W 2700°K, 40°, Zwart |
| EE-PIC7/30-15W | Pico 7W 3000°K, 15°, Wit |
| EE-PIC7/30-25W | Pico 7W 3000°K, 25°, Wit |
| EE-PIC7/30-40W | Pico 7W 3000°K, 40°, Wit |
| EE-PIC7/30-15B | Pico 7W 3000°K, 15°, Zwart |
| EE-PIC7/30-25B | Pico 7W 3000°K, 25°, Zwart |
| EE-PIC7/30-40B | Pico 7W 3000°K, 40°, Zwart |
| EE-PIC7/27-15W-IP54 | Pico 7W 2700°K, 15°, Wit, IP54 |
| EE-PIC7/27-25W-IP54 | Pico 7W 2700°K, 25°, Wit, IP54 |
| EE-PIC7/27-40W-IP54 | Pico 7W 2700°K, 40°, Wit, IP54 |
| EE-PIC7/27-15B-IP54 | Pico 7W 2700°K, 15°, Zwart, IP54 |
| EE-PIC7/27-25B-IP54 | Pico 7W 2700°K, 25°, Zwart, IP54 |
| EE-PIC7/27-40B-IP54 | Pico 7W 2700°K, 40°, Zwart, IP54 |
| EE-PIC7/30-15W-IP54 | Pico 7W 3000°K, 15°, Wit, IP54 |
| EE-PIC7/30-25W-IP54 | Pico 7W 3000°K, 25°, Wit, IP54 |
| EE-PIC7/30-40W-IP54 | Pico 7W 3000°K, 40°, Wit, IP54 |
| EE-PIC7/30-15B-IP54 | Pico 7W 3000°K, 15°, Zwart, IP54 |
| EE-PIC7/30-25B-IP54 | Pico 7W 3000°K, 25°, Zwart, IP54 |
| EE-PIC7/30-40B-IP54 | Pico 7W 3000°K, 40°, Zwart, IP54 |
| EE-PIC7/27-15W-DA | Pico 7W 2700°K, 15°, Wit, Dali |
| EE-PIC7/27-25W-DA | Pico 7W 2700°K, 25°, Wit, Dali |
| EE-PIC7/27-40W-DA | Pico 7W 2700°K, 40°, Wit, Dali |
| EE-PIC7/27-15B-DA | Pico 7W 2700°K, 15°, Zwart, Dali |
| EE-PIC7/27-25B-DA | Pico 7W 2700°K, 25°, Zwart, Dali |
| EE-PIC7/27-40B-DA | Pico 7W 2700°K, 40°, Zwart, Dali |

| | |
|------------------------|--|
| EE-PIC7/30-15W-DA | Pico 7W 3000°K, 15°, Wit, Dali |
| EE-PIC7/30-25W-DA | Pico 7W 3000°K, 25°, Wit, Dali |
| EE-PIC7/30-40W-DA | Pico 7W 3000°K, 40°, Wit, Dali |
| EE-PIC7/30-15B-DA | Pico 7W 3000°K, 15°, Zwart, Dali |
| EE-PIC7/30-25B-DA | Pico 7W 3000°K, 25°, Zwart, Dali |
| EE-PIC7/30-40B-DA | Pico 7W 3000°K, 40°, Zwart, Dali |
| EE-PIC7/27-15W-DA-IP54 | Pico 7W 2700°K, 15°, Wit, Dali, IP54 |
| EE-PIC7/27-25W-DA-IP54 | Pico 7W 2700°K, 25°, Wit, Dali, IP54 |
| EE-PIC7/27-40W-DA-IP54 | Pico 7W 2700°K, 40°, Wit, Dali, IP54 |
| EE-PIC7/27-15B-DA-IP54 | Pico 7W 2700°K, 15°, Zwart, Dali, IP54 |
| EE-PIC7/27-25B-DA-IP54 | Pico 7W 2700°K, 25°, Zwart, Dali, IP54 |
| EE-PIC7/27-40B-DA-IP54 | Pico 7W 2700°K, 40°, Zwart, Dali, IP54 |
| EE-PIC7/30-15W-DA-IP54 | Pico 7W 3000°K, 15°, Wit, Dali, IP54 |
| EE-PIC7/30-25W-DA-IP54 | Pico 7W 3000°K, 25°, Wit, Dali, IP54 |
| EE-PIC7/30-40W-DA-IP54 | Pico 7W 3000°K, 40°, Wit, Dali, IP54 |
| EE-PIC7/30-15B-DA-IP54 | Pico 7W 3000°K, 15°, Zwart, Dali, IP54 |
| EE-PIC7/30-25B-DA-IP54 | Pico 7W 3000°K, 25°, Zwart, Dali, IP54 |
| EE-PIC7/30-40B-DA-IP54 | Pico 7W 3000°K, 40°, Zwart, Dali, IP54 |