


MINI TUBELLO

EE-MTB8



10W

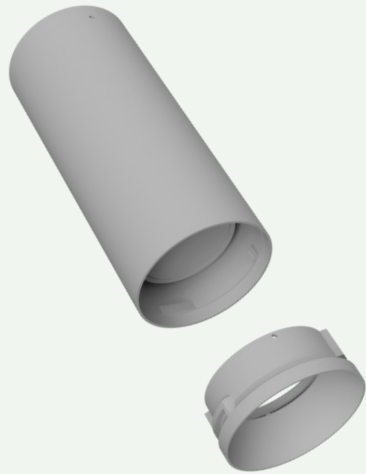

2700K/
3000K



886 lm



25°/40°

TECHNICAL FEATURES



Power	10W
Input current	220-240 Vac
Dimmable	/
IP rating	20
Max. amb. Temp.	45°C


LIGHTING CHARACTERISTICS

Light color	2700/3000 K
Beam angle	25°/40°
CRI	RA90+
Lumen output	886 lm
LEDtype	CREE CXA 1507


MEASUREMENTS AND MATERIAL FEATURES

Measurements	155 x 65 mm
Material	aluminium
Color housing	black/white
Color innerring	black/white/gold

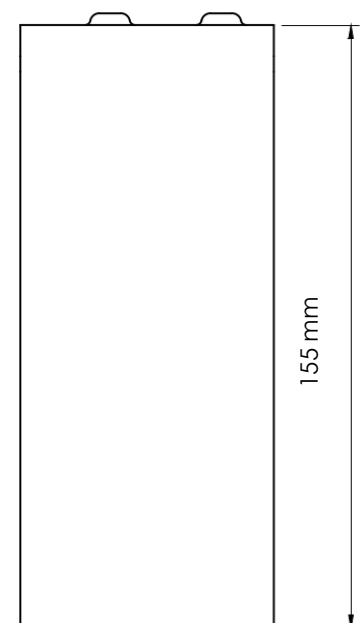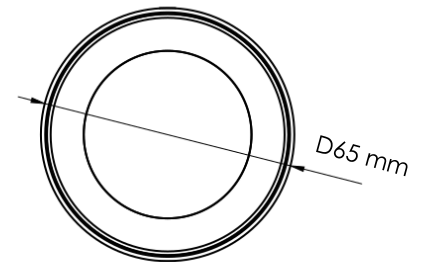

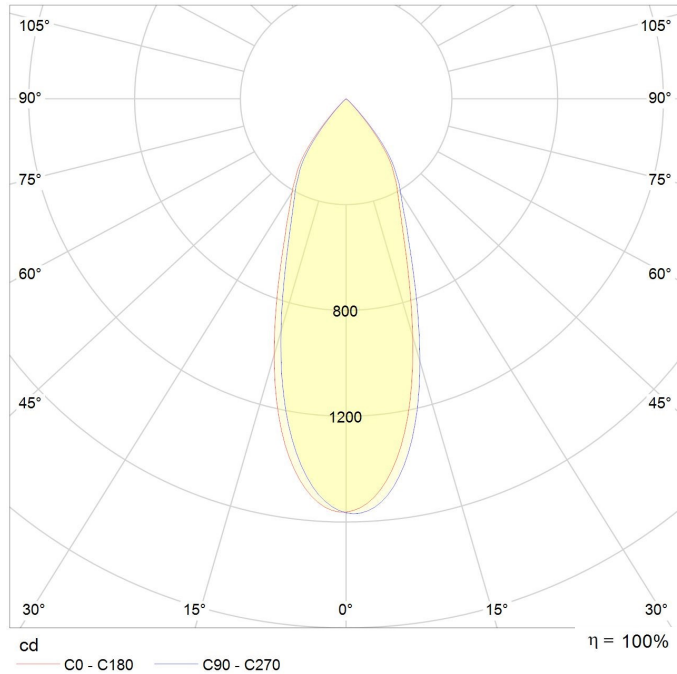

MINI TUBELLO 8 - beam angle 40°

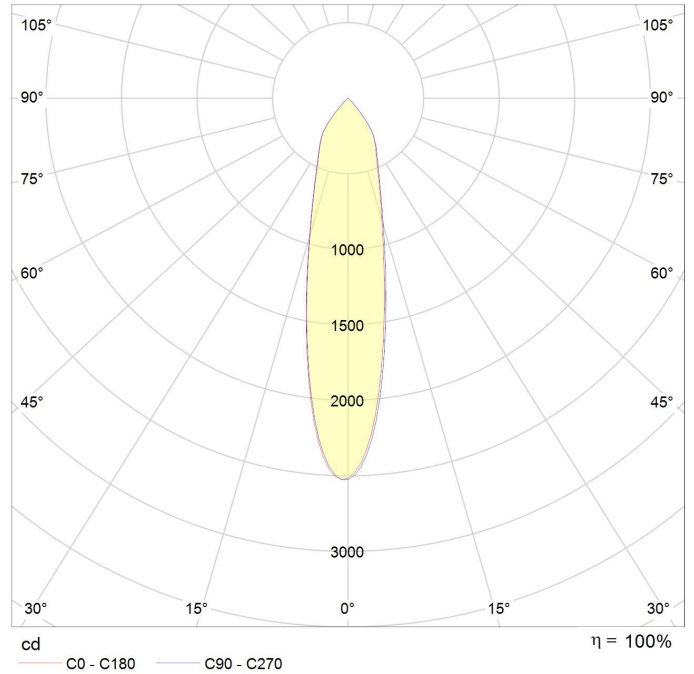

MINI TUBELLO 8 - beam angle 25°

	PRODUCTTYPE	POWER	LIGHT COLOR	BEAM ANGLE	COLOR HOUSING	COLOR INNERRING
EE-	MTB	10 /	27 -	25	B	G
	MINI TUBELLO	WATT	KELVIN	°	BLACK/WHITE	BLACK/WHITE /GOLD

. MTB8

EE-MTB8/27-25BB	Mini 10W 2700°K, 25°, behuizing zwart, binnenring zwart
EE-MTB8/27-25BW	Mini 10W 2700°K, 25°, behuizing zwart, binnenring wit
EE-MTB8/27-25BG	Mini 10W 2700°K, 25°, behuizing zwart, binnenring goud
EE-MTB8/27-25WB	Mini 10W 2700°K, 25°, behuizing wit, binnenring zwart
EE-MTB8/27-25WW	Mini 10W 2700°K, 25°, behuizing wit, binnenring wit
EE-MTB8/27-25WG	Mini 10W 2700°K, 25°, behuizing wit, binnenring goud
EE-MTB8/27-40BB	Mini 10W 2700°K, 40°, behuizing zwart, binnenring zwart
EE-MTB8/27-40BW	Mini 10W 2700°K, 40°, behuizing zwart, binnenring wit
EE-MTB8/27-40BG	Mini 10W 2700°K, 40°, behuizing zwart, binnenring goud
EE-MTB8/27-40WB	Mini 10W 2700°K, 40°, behuizing wit, binnenring zwart
EE-MTB8/27-40WW	Mini 10W 2700°K, 40°, behuizing wit, binnenring wit
EE-MTB8/27-40WG	Mini 10W 2700°K, 40°, behuizing wit, binnenring goud

EE-MTB8/30-25BB	Mini 10W 3000°K, 25°, behuizing zwart, binnenring zwart
EE-MTB8/30-25BW	Mini 10W 3000°K, 25°, behuizing zwart, binnenring wit
EE-MTB8/30-25BG	Mini 10W 3000°K, 25°, behuizing zwart, binnenring goud
EE-MTB8/30-25WB	Mini 10W 3000°K, 25°, behuizing wit, binnenring zwart
EE-MTB8/30-25WW	Mini 10W 3000°K, 25°, behuizing wit, binnenring wit
EE-MTB8/30-25WG	Mini 10W 3000°K, 25°, behuizing wit, binnenring goud
EE-MTB8/30-40BB	Mini 10W 3000°K, 40°, behuizing zwart, binnenring zwart
EE-MTB8/30-40BW	Mini 10W 3000°K, 40°, behuizing zwart, binnenring wit
EE-MTB8/30-40BG	Mini 10W 3000°K, 40°, behuizing zwart, binnenring goud
EE-MTB8/30-40WB	Mini 10W 3000°K, 40°, behuizing wit, binnenring zwart
EE-MTB8/30-40WW	Mini 10W 3000°K, 40°, behuizing wit, binnenring wit
EE-MTB8/30-40WG	Mini 10W 3000°K, 40°, behuizing wit, binnenring goud