

LEDSTRIP

SILICONE LED NEON LIGHT

EE-NL0612/5



5W/m



2100 - 6000k



**29 - 38
lm/w**



120°



**Dimmable
PWM**

TECHNICAL FEATURES

Power	5W/m
Input current	24 Vdc
Dimmable	PWM
IP rating	67
Max. amb. Temp.	-25°C up to 55°C

MEASUREMENTS AND MATERIAL FEATURES

Measurements	6 x 6 x 5000 /10000 mm
Cutable every...	50 mm

LIGHTING CHARACTERISTICS COLORS





Light color	Red/Green/Blauwe/ Amber/Pink/RGB
Beam angle	120°
CRI	—
Lifetime	50000h
SDCM	3
Lumen / watt	R:16.4 lm/w G:48 lm/w B:5.9 lm/w A:12.3 lm/w P:15.6 lm/w RGB:14.6 lm/w
Lumen / meter	R:82 lm/m G:240 lm/m B:29.7 lm/m A:61.4 lm/m P:78 lm/m RGB:73 lm/m

LIGHTING CHARACTERISTICS WHITE


Light color	2100/2400/2700/3000/3500 /4000/5000/6000 k
Beam angle	120°
CRI	RA90+
Lifetime	50000h
SDCM	3
Lumen / watt	2100K: 29 lm/w 2400K: 34.6 lm/w 2700K: 35.6 lm/w 3000K: 30.8 lm/w 3500K: 33.8 lm/w 4000K: 37.2 lm/w 5000K: 37.4 lm/w 6000K: 38 lm/w
Lumen / meter	2100K: 145 lm/m 2400K: 173 lm/m 2700K: 178 lm/m 3000K: 154 lm/m 3500K: 169 lm/m 4000K: 186 lm/m 5000K: 187 lm/m 6000K: 190 lm/m

LIGHTING CHARACTERISTICS TUNABLE WHITE

Light color	Tunable white
CRI	RA80+
Lifetime	50000h
SDCM	3
Lumen / watt	TW: 31.6 lm/w
Lumen / meter	TW: 158 lm/m

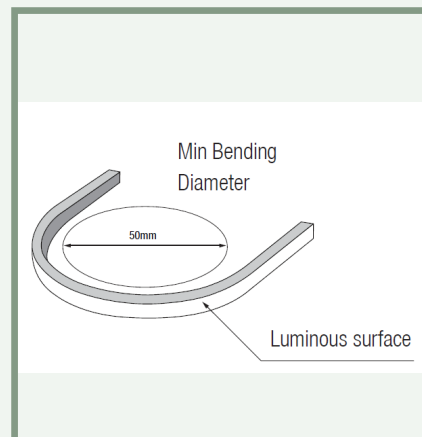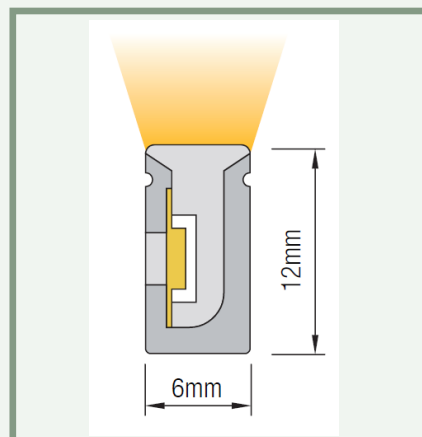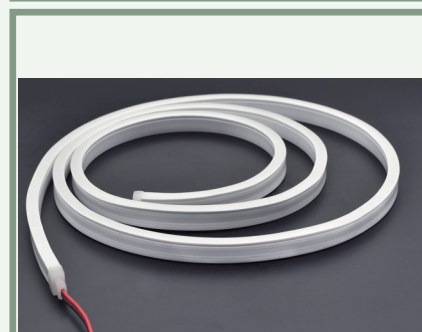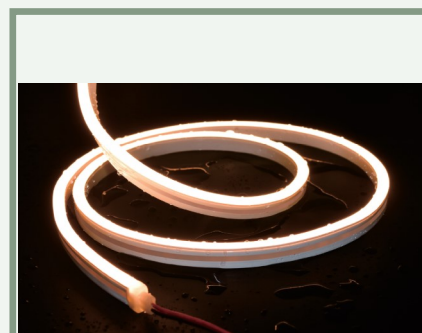

Accessories

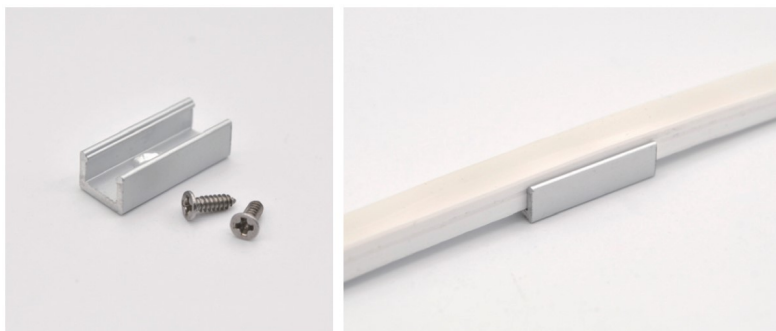


Aluminium Mounting Clips 20x9x8mm(L x W x H)



Aluminium profile 1000x9x6mm(L x W x H)

Max.run Length

2100K	15 m
2400K	15 m
2700K	15 m
3000K	15 m
3500K	15 m
4000K	15 m
5000K	15 m
6000K	15 m
TW	5 m
R	20 m
G	15 m
B	15 m
A	20 m
P	15 m
RGB	5 m

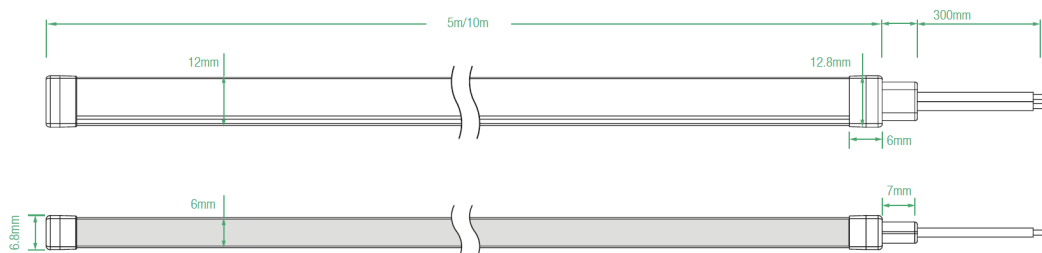

PRODUCTTYPE	Dimension	POWER	LIGHT COLOR
EE	-NL	0612	/ 5 - 24
	6x12 mm	WATT/M	2400 KELVIN

SUMMARY PRODUCTCODES LED SELECONE NEON LIGHT 5WATT 6x12 mm

- EE-NL0612/5-21
- EE-NL0612/5-24
- EE-NL0612/5-27
- EE-NL0612/5-30
- EE-NL0612/5-35
- EE-NL0612/5-40
- EE-NL0612/5-50
- EE-NL0612/5-60
- EE-NL0612/5-TW
- EE-NL0612/5-R
- EE-NL0612/5-G
- EE-NL0612/5-B
- EE-NL0612/5-A
- EE-NL0612/5-P
- EE-NL0612/5-RGB

Accessories CODES FOR LED SELECONE NEON LIGHT 5 WATT 6x12 mm

- EE-NLCL/6x12
- EE-NLAP/6x12 -1000

