

**LINEAR**

**PLL-NG**



5-21 W/m



3000K/  
4000K



410-3000  
lm/m



110°



dimmable  
DALI

**TECHNICAL FEATURES**


Power	5 - 21W/m
Input current	100-240 Vac
Dimmable	DALI, optional 0/1-10V
IP rating	IP20, optional IP54
Max. amb. Temp.	45°C
Installation	Recessed Surface mounted Wall mounted Pendant

**LIGHTING CHARACTERISTICS**


Light color	3000/4000K
Beam angle	110°
CRI	RA90+
Lumen output	410 - 3000lm/m
UGR	<19
LEDtype	SMD , COB
Lifetime	L90B10 50000h
SDCM	3

**MEASUREMENTS AND MATERIAL FEATURES**


Measurements	42 mm x 65 mm x L L = max 3000mm
Material housing	aluminium
Housing color	White/black
Material cover	PC

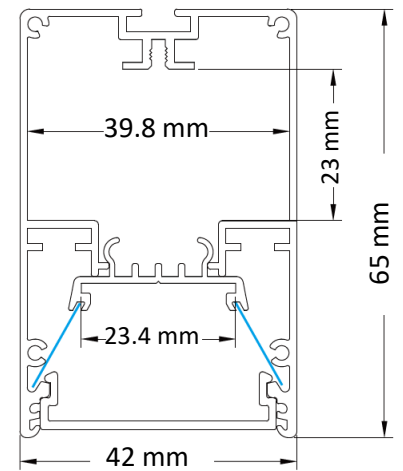

**1. CHOOSE YOUR LINEAR LENGTH**

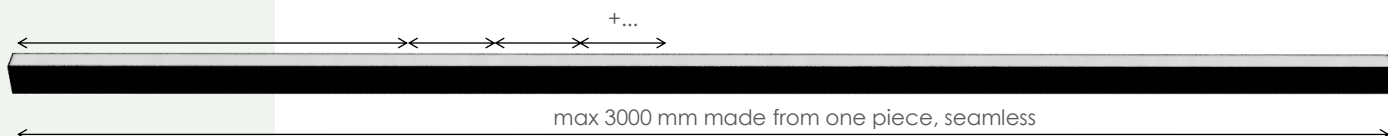


**2. CHOOSE YOUR CONNECTORS**

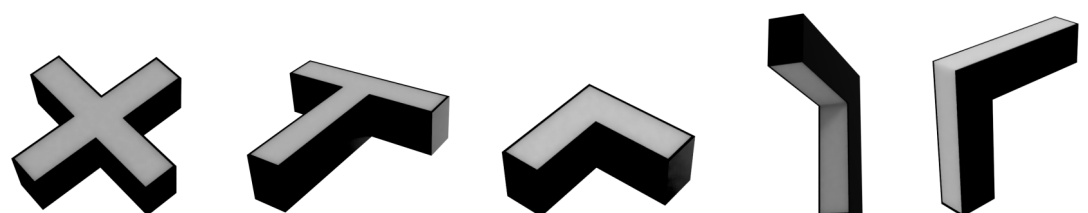


INSTALLATION


MOUNTED

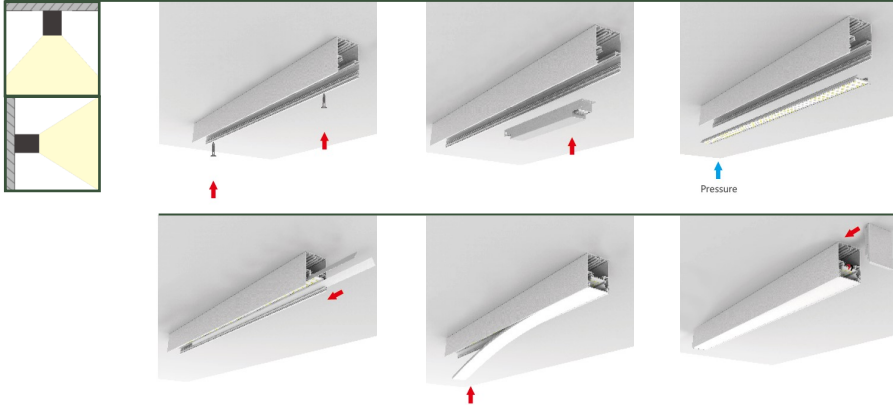

PENDANT

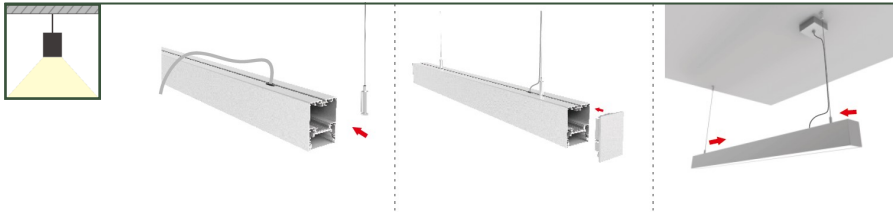

RECESSED

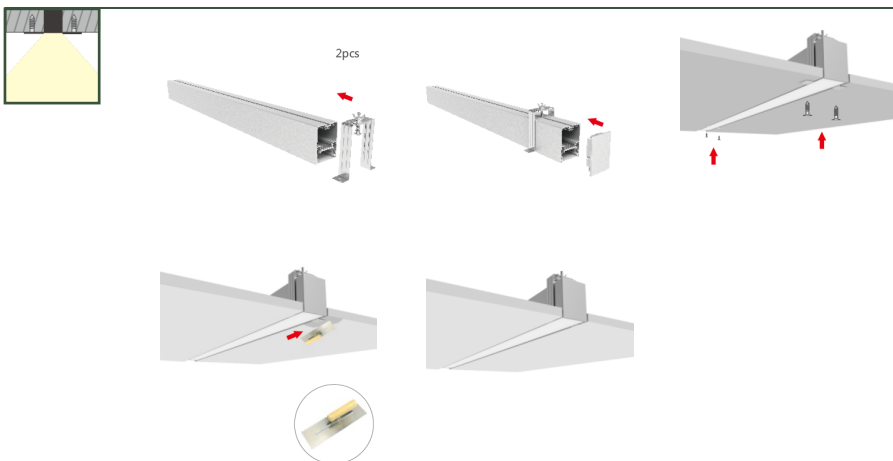

**LINEAR**

**PLL-NG**

PRODUCTTYPE	LENGTH	POWER	LIGHT COLOR	HOUSING	DIMMABLE	OPTIONAL	OPTIONAL
<b>EE- PLL</b>	<b>1000 /</b>	<b>21 -</b>	<b>40</b>	<b>B -</b>	<b>DA -</b>	<b>EM</b>	<b>L1</b>
PROFILE LINEAR	1000mm	WATT	4000K	BLACK/WHITE	DALI	EMERGENCY UNIT	1 SIDE LINKABLE