

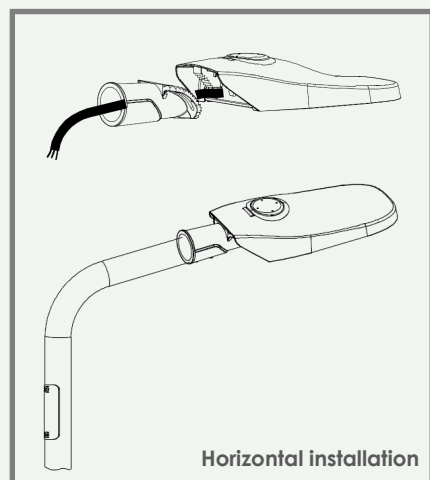


VIALE

EE-VI30

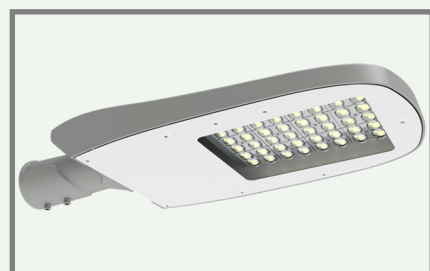

Horizontal installation

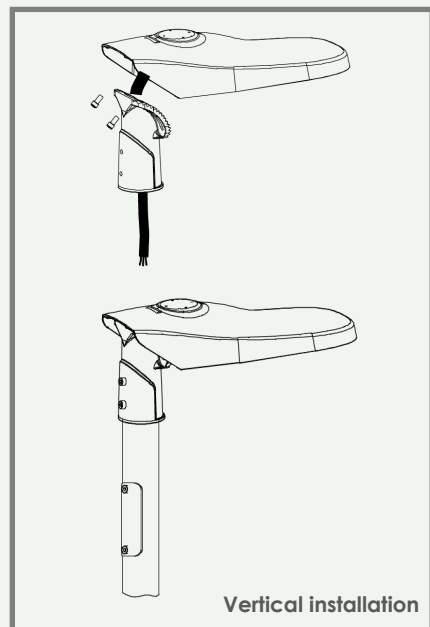

Vertical installation



30W



3000 /
4000 K



4200 lm



146°
asymmetric



Optional
DALI/1-10V

TECHNICAL FEATURES


Power	30W
Input current	AC100-277V
Dimmable	Optional dali/1-10V
IP rating	IP66/IK08
Max. amb. Temp.	55°C


LIGHTING CHARACTERISTICS

Light color	3000/4000 K
CRI	RA70+
Lumen output	4200 lm
LED-type	EMC5050
Amount of LED's	16
UGR	<27
Beam angle	146° asymmetric
Lifetime	L80B10 50000h
Switching cycles	100.000 times

MEASUREMENTS AND MATERIAL FEATURES

Measurements	540 x 201,50 x 90,5 mm
Weight	4 kg
Material	Aluminium housing: housing color - grey Tempered glass
Installation	Horizontal/vertical

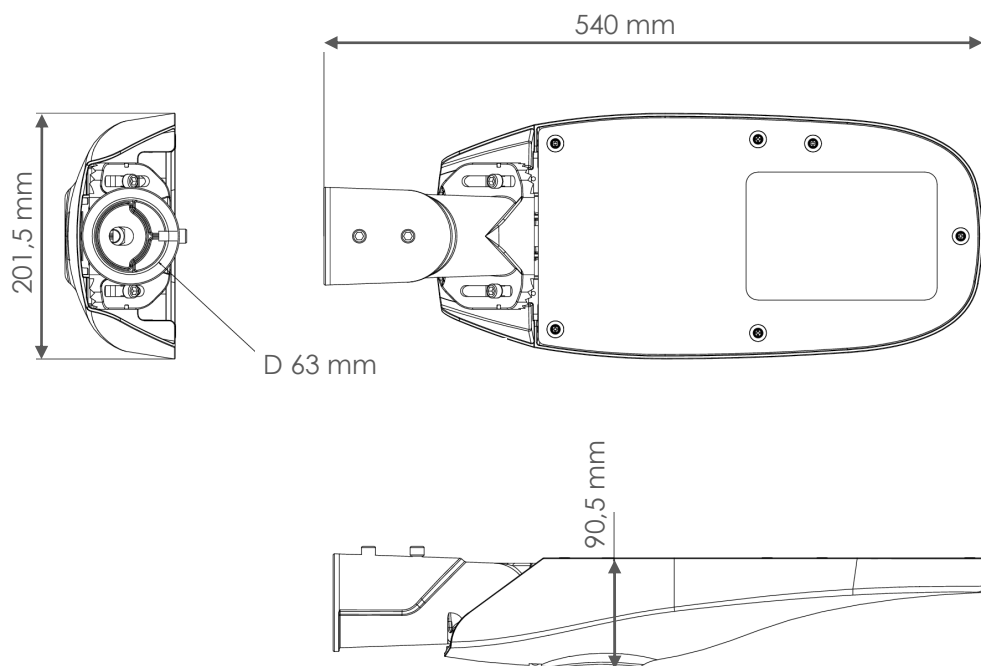

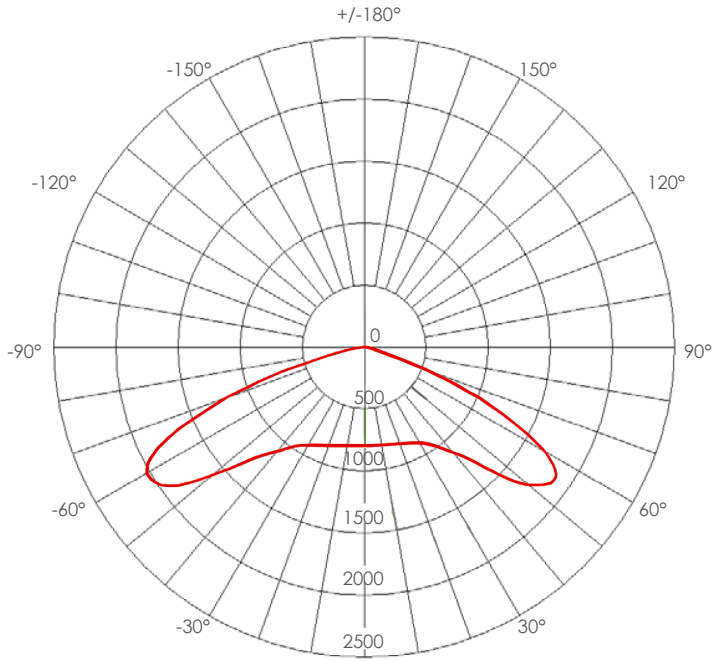

VI40

PRODUCTTYPE	POWER	LIGHT COLOR
EE- VI	40	30
VIALE	40 Watt	3000 K

EE-VI30/30

Streetlight Viale 30 Watt 3000K

EE-VI30/40

Streetlight Viale 30 Watt 4000K

5-YEAR WARRANTY

