

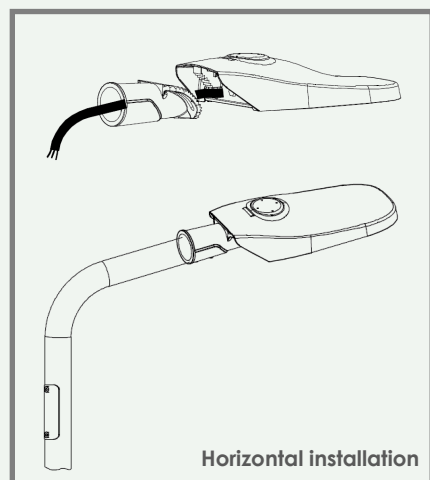


VIALE

EE-VI40

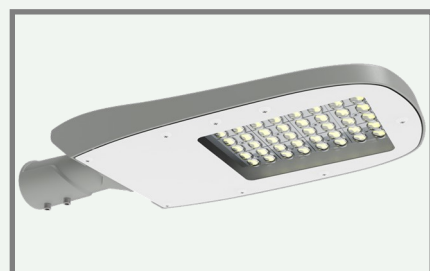

Horizontal installation

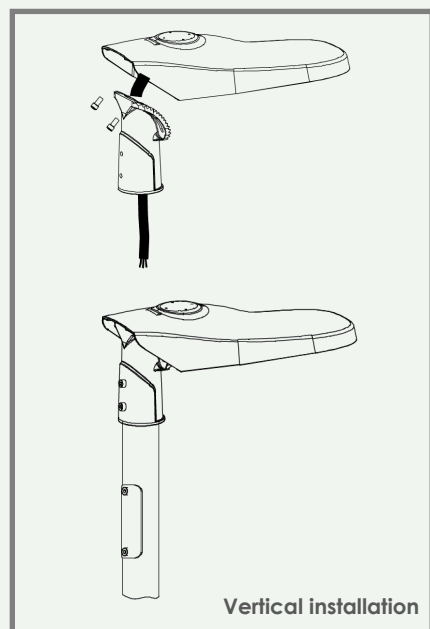

Vertical installation



40W



3000 /  
4000 K



5600 lm



146°  
asymmetric



Optional  
Dali/1-10V

**TECHNICAL FEATURES**


Power	40W
Input current	AC100-277V
Dimmable	Optional dali/1-10V
IP rating	IP66/IK08
Max. amb. Temp.	55°C


**LIGHTING CHARACTERISTICS**

Light color	3000/4000 K
CRI	RA70+
Lumen output	5600 lm
LED-type	EMC5050
Amount of LED's	16
UGR	<27
Beam angle	146° asymmetric
Lifetime	L80B10 50000h
Switching cycles	100.000 times

**MEASUREMENTS AND MATERIAL FEATURES**

Measurements	540 x 201,50 x 90,5 mm
Weight	4 kg
Material	Aluminium housing: housing color - grey Tempered glass
Installation	Horizontal/vertical

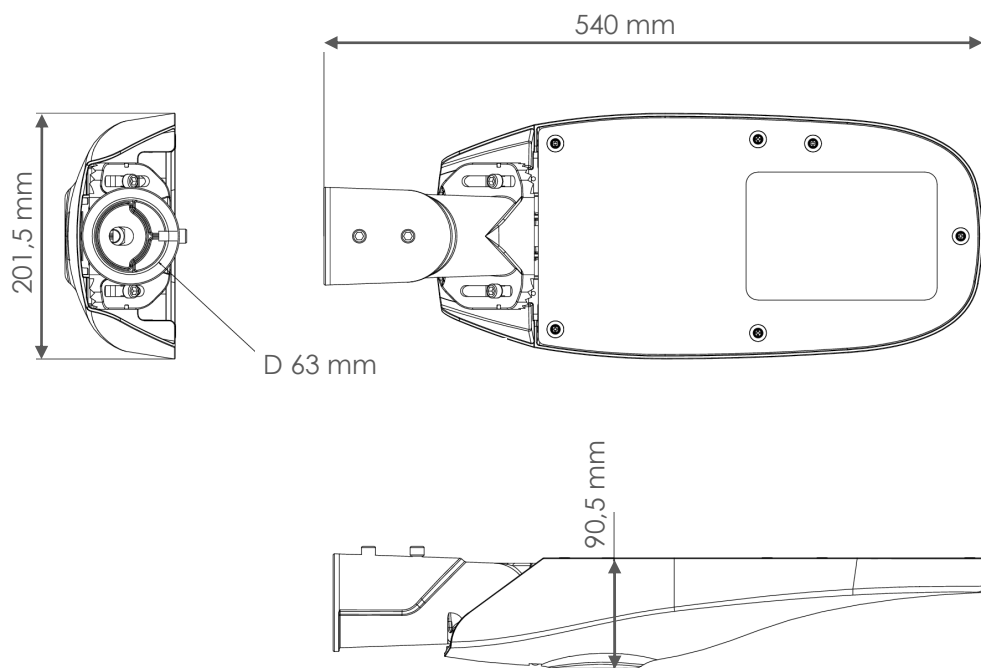

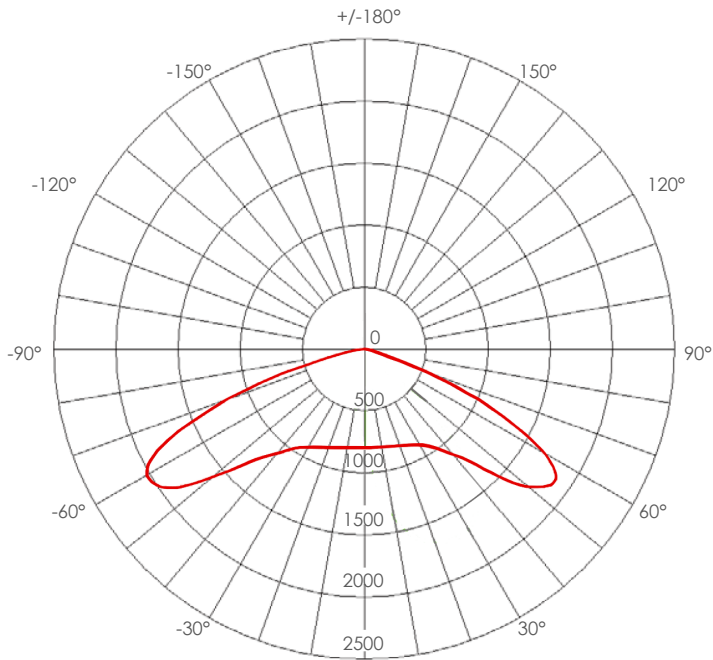

**VI40**

PRODUCTTYPE	POWER	LIGHT COLOR
<b>EE- VI</b>	<b>40</b>	<b>30</b>
VIALE	40 Watt	3000 K

EE-VI40/30

Streetlight Viale 40 Watt 3000K

EE-VI40/40

Streetlight Viale 40 Watt 4000K

5-YEAR WARRANTY

