

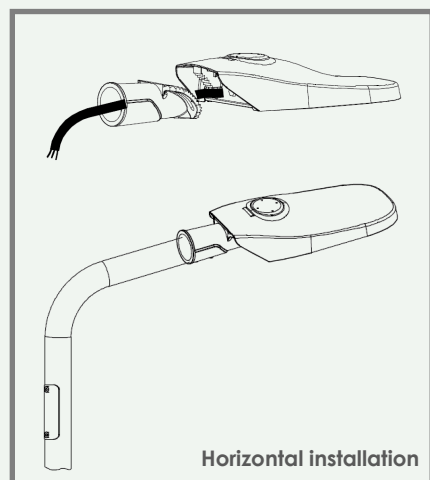


VIALE

EE-VI100

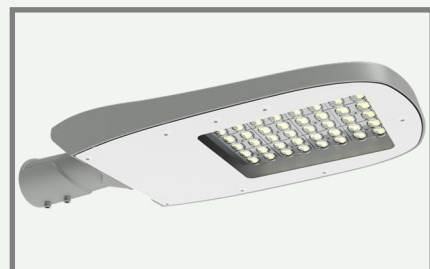

Horizontal installation

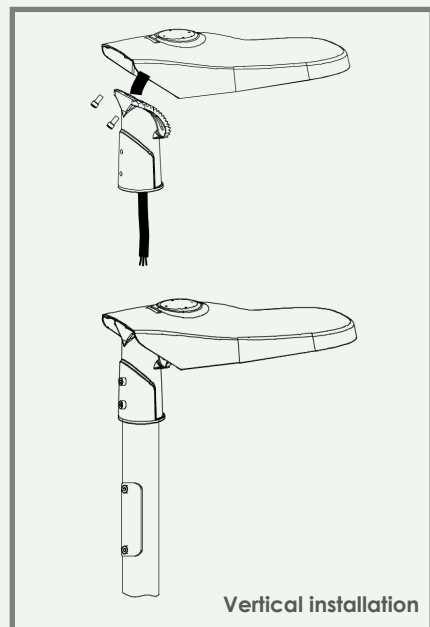

Vertical installation



100W



3000 /
4000 K



14000 lm



146°
asymmetric



Optional
Dali/1-10V

TECHNICAL FEATURES


Power	100W
Input current	AC100-277V
Dimmable	Optional dali/1-10V
IP rating	IP66/IK08
Max. amb. Temp.	55°C


LIGHTING CHARACTERISTICS

Light color	3000/4000 K
CRI	RA70+
Lumen output	14000 lm
LED-type	EMC5050
Amount of LED's	24
UGR	<27
Beam angle	146° asymmetric
Lifetime	L80B10 50000h
Switching cycles	100.000 times

MEASUREMENTS AND MATERIAL FEATURES

Measurements	600 x 260 x 95,5 mm
Weight	6 kg
Material	Aluminium housing: housing color - grey Tempered glass
Installation	Horizontal/vertical

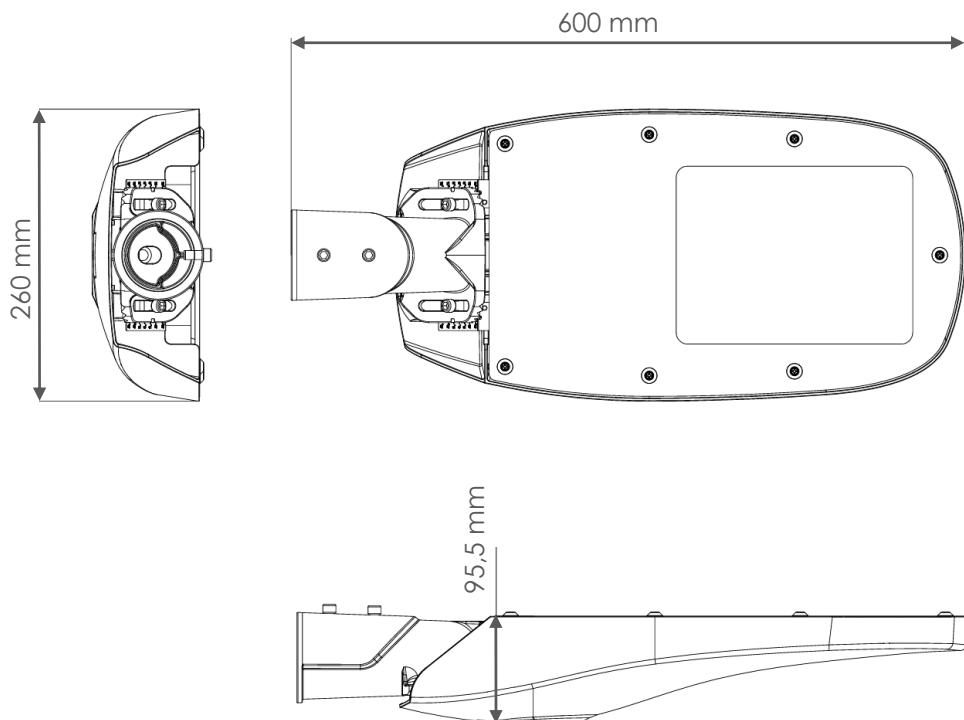

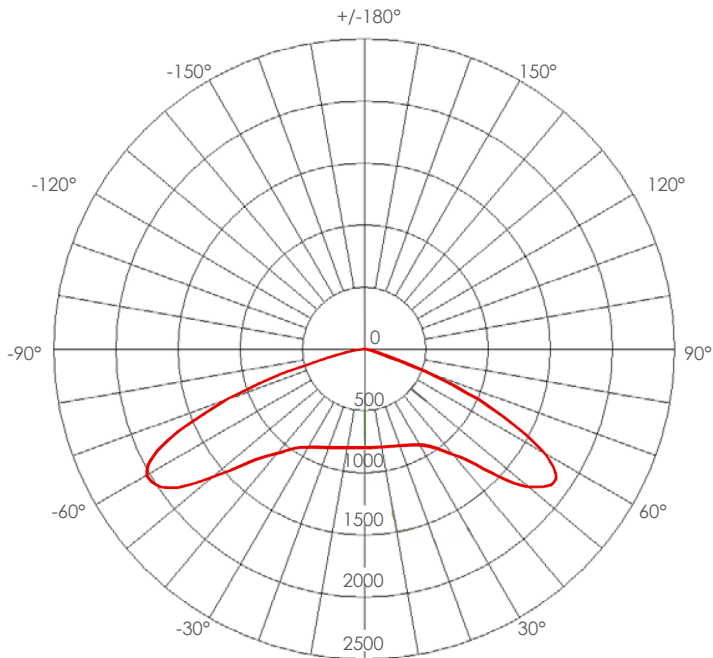

VI100

PRODUCTTYPE	POWER	LIGHT COLOR
EE- VI	100	30
VIALE	80 Watt	3000 K

EE-VI100/30

Streetlight Viale 100 Watt 3000K

EE-VI100/40

Streetlight Viale 100 Watt 4000K

5-YEAR WARRANTY

RoHS **CE**