

CONCEPT E

Flat Edge

EE-CEFE11



11W



2700K/3000K  
4000K/DW



1047 lm



25°/40°



Dimmable  
TRIAC



**TECHNICAL FEATURES**

Power	11W
Input Volt	220-240 Vac
Driver	Built-out Sec: DC 20-43V, 250mA
Dimmable	Triac, Optional Dali
IP rating	40
Max. amb. Temp.	45°C

**MEASUREMENTS AND MATERIAL FEATURES**


Measurements	φ82 x 68 mm
Material	aluminium
Color	black/white

Cut-Out:72 mm

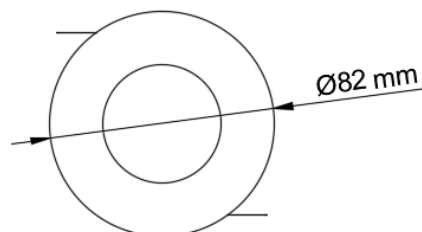


**LIGHTING CHARACTERISTICS**

	2700K/3000K/4000K
Light color	DW: (dim to warm ) (1800 - 3000K )
Lumen output	2700K: 820 lm 3000K: 886 lm 4000K: 1047 lm
Beam angle	2700K: 25°/40° 3000K: 25°/40° 4000K: 40° DW : 40°
CRI	RA90+
LEDtype	CREE
Lifetime	L80B10 50000h
SDCM	3
Flux Code:	25°: 97 100 100 100 100 40°: 96 100 100 100 100

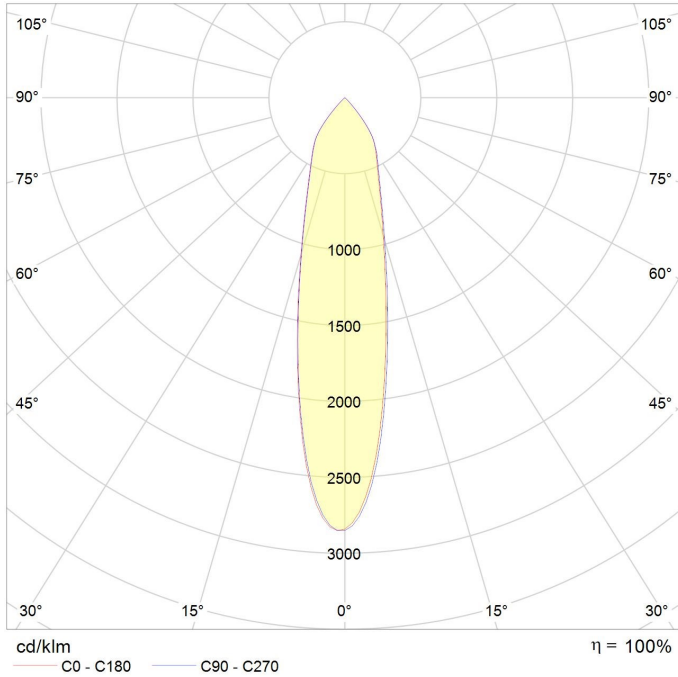

CEFE11 - beam angle 25°

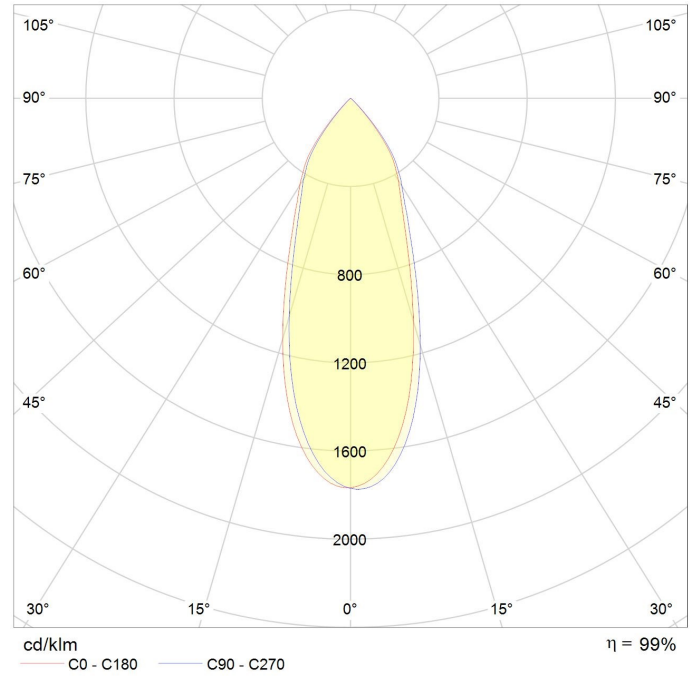

CEFE11 - beam angle 40°

PRODUCTTYPE	POWER	LIGHT COLOR	BEAM ANGLE	COLOR
<b>EE- CEFE</b>	<b>11</b>	<b>/ 27</b>	<b>- 25</b>	<b>B</b>
CONCEPT E FLAT EDGE	WATT	KELVIN	°	BLACK/WHITE

**. FLAT EDGE**

EE-CEFE11/27-25B	Flat Edge 11W 2700°K 25° Zwart
EE-CEFE11/27-25W	Flat Edge 11W 2700°K 25° Wit
EE-CEFE11/27-40B	Flat Edge 11W 2700°K 40° Zwart
EE-CEFE11/27-40W	Flat Edge 11W 2700°K 40° Wit
EE-CEFE11/30-25B	Flat Edge 11W 3000°K 25° Zwart
EE-CEFE11/30-25W	Flat Edge 11W 3000°K 25° Wit
EE-CEFE11/30-40B	Flat Edge 11W 3000°K 40° Zwart
EE-CEFE11/30-40W	Flat Edge 11W 3000°K 40° Wit
EE-CEFE11/40-40B	Flat Edge 11W 4000°K 40° Zwart
EE-CEFE11/40-40W	Flat Edge 11W 4000°K 40° Wit
EE-CEFE11/DW-40B	Flat Edge 11W DW 40° Zwart
EE-CEFE11/DW-40W	Flat Edge 11W DW 40° Wit

**. FLAT EDGE IP54**

EE-CERE11/27-25B-IP54	Flat Edge 11W 2700°K 25° Zwart, IP54
EE-CERE11/27-25W-IP54	Flat Edge 11W 2700°K 25° Wit, IP54
EE-CERE11/27-40B-IP54	Flat Edge 11W 2700°K 40° Zwart, IP54
EE-CERE11/27-40W-IP54	Flat Edge 11W 2700°K 40° Wit, IP54
EE-CERE11/30-25B-IP54	Flat Edge 11W 3000°K 25° Zwart, IP54
EE-CERE11/30-25W-IP54	Flat Edge 11W 3000°K 25° Wit, IP54
EE-CERE11/30-40B-IP54	Flat Edge 11W 3000°K 40° Zwart, IP54
EE-CERE11/30-40W-IP54	Flat Edge 11W 3000°K 40° Wit, IP54
EE-CERE11/40-40B-IP54	Flat Edge 11W 4000°K 40° Zwart, IP54
EE-CEMRE11/40-40W-IP54	Flat Edge 11W 4000°K 40° Wit, IP54
EE-CERE11/DW-40B-IP54	Flat Edge 11W DW 40° Zwart, IP54
EE-CERE11/DW-40W-IP54	Flat Edge 11W DW 40° Wit, IP54

**. FLAT EDGE DALI**

EE-CERE11/27-25B-DA	Flat Edge 11W 2700°K 25° Zwart, Dali
EE-CERE11/27-25W-DA	Flat Edge 11W 2700°K 25° Wit, Dali
EE-CERE11/27-40B-DA	Flat Edge 11W 2700°K 40° Zwart, Dali
EE-CERE11/27-40W-DA	Flat Edge 11W 2700°K 40° Wit, Dali
EE-CERE11/30-25B-DA	Flat Edge 11W 3000°K 25° Zwart, Dali
EE-CERE11/30-25W-DA	Flat Edge 11W 3000°K 25° Wit, Dali
EE-CERE11/30-40B-DA	Flat Edge 11W 3000°K 40° Zwart, Dali
EE-CERE11/30-40W-DA	Flat Edge 11W 3000°K 40° Wit, Dali
EE-CERE11/40-40B-DA	Flat Edge 11W 4000°K 40° Zwart, Dali
EE-CERE11/40-40W-DA	Flat Edge 11W 4000°K 40° Wit, Dali
EE-CERE11/DW-40B-DA	Flat Edge 11W DW 40° Zwart, Dali
EE-CERE11/DW-40W-DA	Flat Edge 11W DW 40° Wit, Dali



**. FLAT EDGE DALI IP54**

EE-CERE11/27-25B-DA-IP54	Flat Edge 11W 2700°K 25° Zwart, Dali, IP54
EE-CERE11/27-25W-DA-IP54	Flat Edge 11W 2700°K 25° Wit, Dali, IP54
EE-CERE11/27-40B-DA-IP54	Flat Edge 11W 2700°K 40° Zwart, Dali, IP54
EE-CERE11/27-40W-DA-IP54	Flat Edge 11W 2700°K 40° Wit, Dali, IP54
EE-CERE11/30-25B-DA-IP54	Flat Edge 11W 3000°K 25° Zwart, Dali, IP54
EE-CERE11/30-25W-DA-IP54	Flat Edge 11W 3000°K 25° Wit, Dali, IP54
EE-CERE11/30-40B-DA-IP54	Flat Edge 11W 3000°K 40° Zwart, Dali, IP54
EE-CERE11/30-40W-DA-IP54	Flat Edge 11W 3000°K 40° Wit, Dali, IP54
EE-CERE11/40-40B-DA-IP54	Flat Edge 11W 4000°K 40° Zwart, Dali, IP54
EE-CERE11/40-40W-DA-IP54	Flat Edge 11W 4000°K 40° Wit, Dali, IP54
EE-CERE11/DW-40B-DA-IP54	Flat Edge 11W DW 40° Zwart, Dali, IP54
EE-CERE11/DW-40W-DA-IP54	Flat Edge 11W DW 40° Wit, Dali, IP54