

ODL15

EE-ODL15



15W



2700K/3000K



1541 lm



100°



Triac

TECHNICAL FEATURES

| | |
|--------------------------|--|
| Power | 15W |
| Input Voltage | 220-240 Vac |
| Driver | Built-in, Flicker-free Sec: 27-42 Vdc 350mA |
| Dimmable | Triac |
| Optional Dimmable | Dali |
| IP rating | 20 |
| Max. amb. Temp. | 45°C |



LIGHTING CHARACTERISTICS


| | |
|---------------------|--------------------------------|
| Light color | 2700k/3000K Optional: 4000K |
| Beam angle | 100° |
| CRI | RA90+ |
| Lumen output | 1541 lm |
| LED type | SMD 2835 |
| Life time | 50000h |
| Flux code | 64 94 100 100 100 |

MEASUREMENTS AND MATERIAL FEATURES

| | |
|---------------------|--------------|
| Measurements | φ91x90 mm |
| Material | Aluminium |
| Body color | Black, White |

Inside ring color
Black, White,
Exclusive Metallic Black,
Exclusive Chrome,
Exclusive Pearly Silver
Exclusive Rose Gold

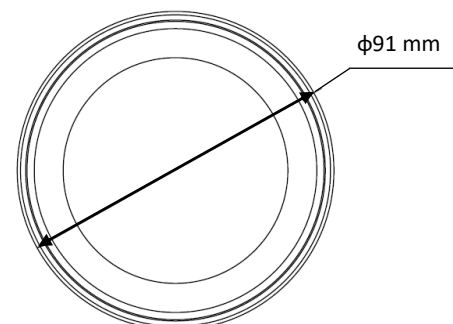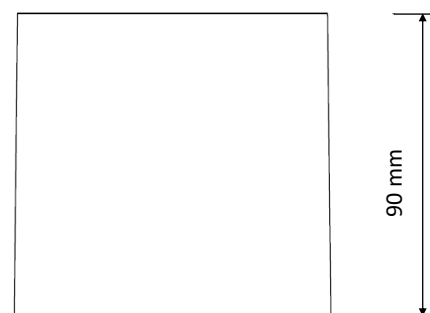

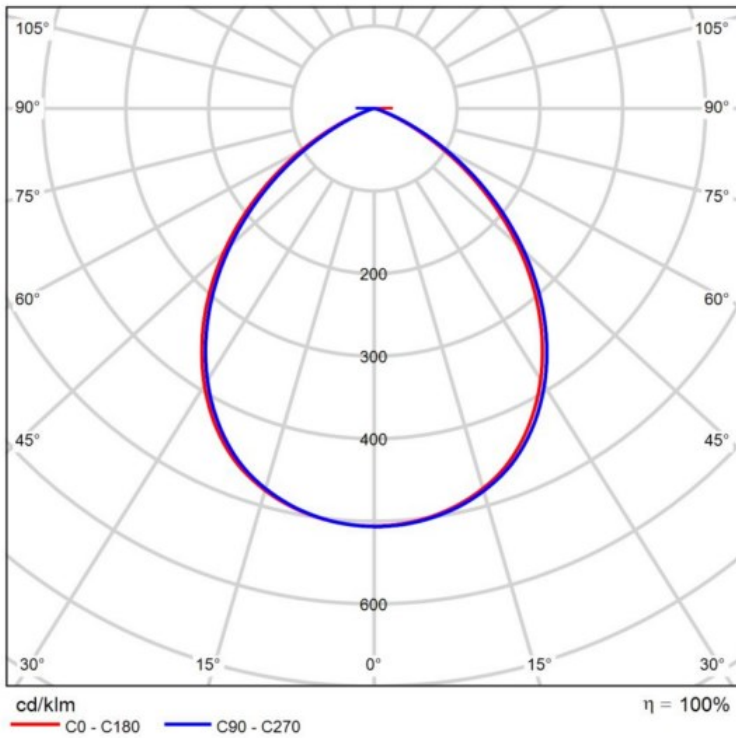

ODL15/30

Code :

| PRODUC TYPE | POWER | LIGHT COLOR | BODY COLOR | INSIDE RING COLOR |
|-------------|---------|-------------|------------|-------------------|
| EE- ODL | 15 / 30 | - W | W | |
| | WATT | 3000 KELVIN | | |