

SCREEN 2 L

awex
EMERGENCY LIGHTING

AC
220-240V
50-60Hz

DC
176-275V

DC
24V

DC
48V

LED

IP40

IK07



MATERIALS

Grey aluminium profiles • Plexi glass

MOUNTING

Surface • Pendant ⁽¹⁾



POWER SUPPLY

Self contained – 220 - 240VAC/50 - 60Hz
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC
Central battery FZLV – 24VDC



LIGHT SOURCE

4W, 5W, 9W LED
Colour temperature: 6000K
Lifetime: 50000h




CHARGING

Premium: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES

Premium: 1h or 3h, LiFePO₄ 6,4V batteries



d=60m

INSULATION CLASS

I or III

IP & IK RATING

IP40, IK07



VIEWING DISTANCE

60 m

VIEWING METHOD

Single sided or double-sided



AMBIENT TEMPERATURE

Self-contained: t_a: 0°C ÷ 40°C
Central battery: t_a: -25°C ÷ 50°C

OPTIONS

SE – non maintained • SA – maintained • AT – autotest • RU – Rubic UNA central monitoring
• RD – DALI central monitoring • FZLV – central battery FZLV 24VDC • FZLV2 – central battery
FZLV II 48VDC • CB – central battery




LiFePO₄

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection
• III class of insulation of FZLV and FZLV2 version • ⁽¹⁾ see accessory for pendant mounting
• ⁽²⁾ Select 2 pcs. of pictogram number from datasheet pictograms



DIMENSIONS [mm]

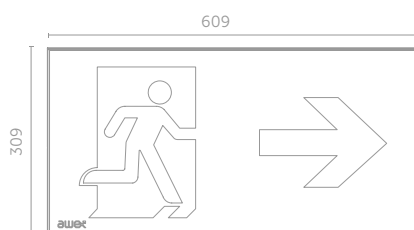

⁽²⁾ pictogram

SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS	COLOR	PICTOGRAM
PREMIUM	SCLS	4W	B	1	3	SE SA	AT RU RD	GR	XX
	SCLD	5W	B	1	3	SE SA	AT RU RD	GR	XX
	SDLS	8W	B	1	3	SE SA	AT RU RD	GR	XXYY
	SDL D	9W	B	1	3	SE SA	AT RU RD	GR	XXYY

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR	PICTOGRAM
SCLS	4W	Z	CB	ADE	GR	XX
SCLD	5W	Z	CB	ADE	GR	XX
SDLS	8W	Z	CB	ADE	GR	XXYY
SDL D	9W	Z	CB	ADE	GR	XXYY

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR	PICTOGRAM
SCLS	4W	FZLV2	GR	XX
SCLD	5W	FZLV2	GR	XX
SDLS	8W	FZLV2	GR	XXYY
SDL D	9W	FZLV2	GR	XXYY

LEGEND:

- SCLS fixture SCREEN 2 L single - sided
- SCLD fixture SCREEN 2 L single - sided with floor illumination
- SDLS fixture SCREEN 2 L double - sided
- SDL D fixture SCREEN 2 L double - sided with floor illumination
- B electronic gear for PREMIUM self-contained fittings
- Z electronic gear for addressable central battery fittings
- SE non maintained
- SA maintained
- PT manual test button
- X fitting without additional options
- AT autotest
- RU Rubic UNA central monitoring
- RD DALI central monitoring
- FZLV2 central battery FZLV II 48 VDC
- CB central battery version
- ADE address module for CBS 2.0 – SMART technology
- GR grey color
- XX pictograms ID (e.g. 21)
- YY pictograms ID (e.g. 22)

