


WALL SEG

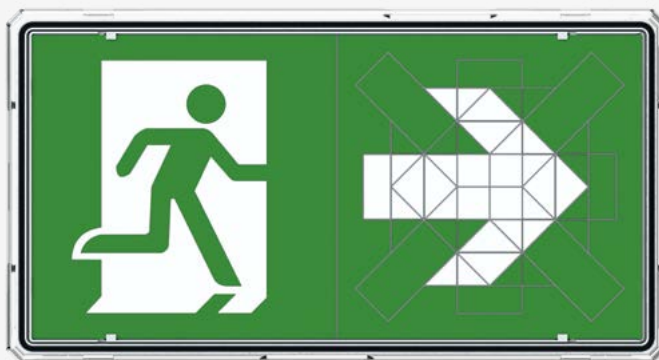

AC
220-240V
50-60Hz

DC
176-275V

DC
48V

IP65

LED



CE



DES



MATERIALS

Stainless steel painted white, grey or black • Transparent polycarbonate cover

MOUNTING

Surface • Optionally pendant[†]

POWER SUPPLY

Self contained – 220 - 240VAC 50/60Hz
Central battery CB – 220 - 240VAC 50/60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC

LIGHT SOURCE

max. 2W LED

INSULATION CLASS

II or III

IP & IK RATING

IP65

AMBIENT TEMPERATURE

Self-contained: t : 0°C ÷ 40°C
Central battery CB: t_a : 0°C ÷ 50°C

OPTIONS

RU – Rubic UNA central monitoring • RD – DALI central monitoring • UNA FZLV2 – central battery FZLV II 48VDC • CB – central battery

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection • III class of insulation of FZLV II version

DIMENSIONS [mm]



SELF-CONTAINED CONFIGURATION

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS	COLOR		
			1	3			WH	GR	BL
WLES WLESL	2W	B	1	3	SE	RU	WH	GR	BL

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR		
WLES WLESL	2W	Z	CB	ADD	WH	GR	BL

FZLV II SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR		
WLES WLESL	2W	FZLV2	WH	GR	BL

LEGENDA:

- WLES dynamic right fixture WALL SEG
- WLESL dynamic left fixture WALL SEG
- B electronic gear for PREMIUM self-contained fittings
- Z electronic gear for addressable central battery fittings
- SE non maintained
- CB central battery version
- RU RUBIC UNA central monitoring
- ADD central battery fixture
- FZLV2 central battery FZLV II 48 VDC
- WH white color
- GR grey color
- BL black color

