

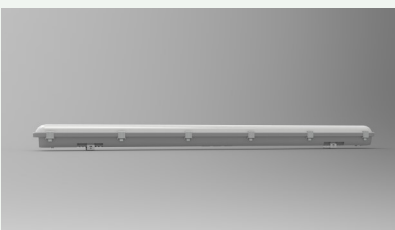
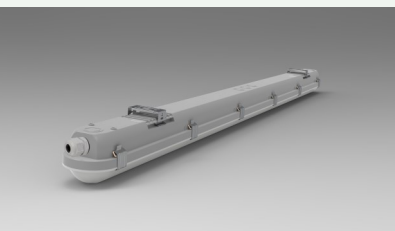


TPS

EE-TPS40

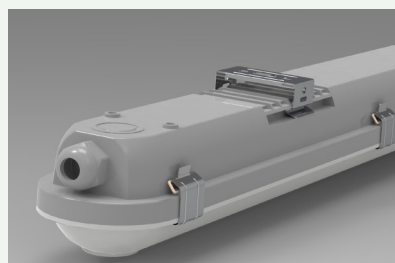

40W

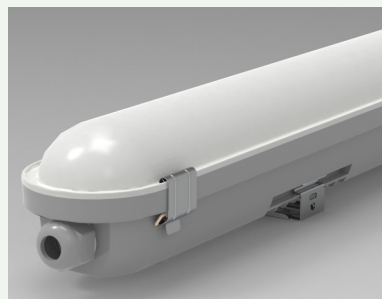

3000/4000K



4475 Lm  
4700 Lm



120°



Optional  
Dali

TECHNICAL FEATURES

<b>Power</b>	40w
<b>IP rating</b>	IP65
<b>Max. amb. Temp.</b>	40C°
<b>Linkable</b>	yes
<b>Optional</b>	emergency unit (1h)

MEASUREMENTS AND MATERIAL FEATURES




<b>Measurements</b>	L1200 x W83 x H72 mm
<b>Material</b>	PC base & PC cover & RVS Clips
<b>Color</b>	Grey

LIGHTING CHARACTERISTICS


<b>Light color</b>	4000 K°
<b>Beam angle</b>	120°
<b>Lumen</b>	3000K : 4475 Lm 4000K : 4700 Lm
<b>LED type</b>	Osram 2835 SMD LED chip
<b>CRI</b>	RA80+
<b>SDCM</b>	2 steps
<b>Life time</b>	50000 h

DRIVER FEATURES


<b>Brand</b>	LIFUD or Eaglerise
<b>Dimming type</b>	Non-dimmable
<b>Input voltage</b>	220 VAC
<b>SEC</b>	1000 mA 36V dc
<b>Optional</b>	Dali

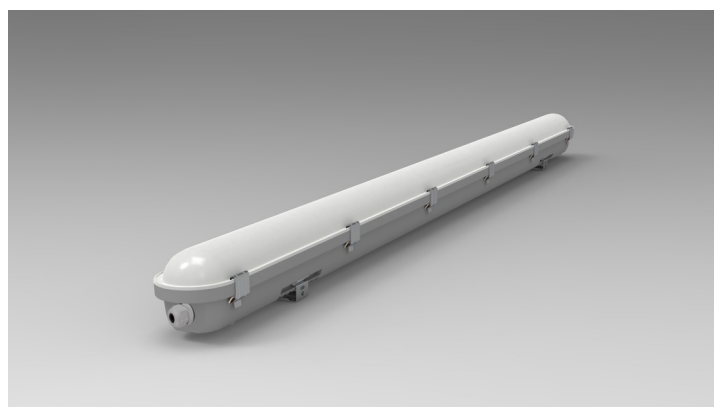

1200 mm

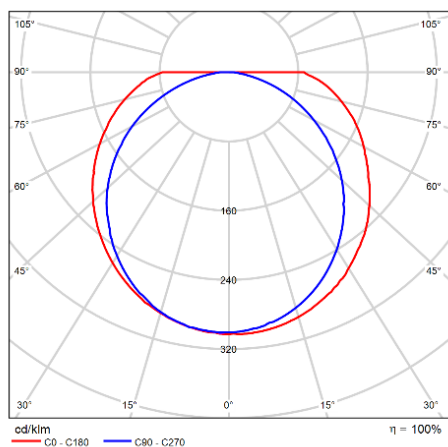

Polar LDC

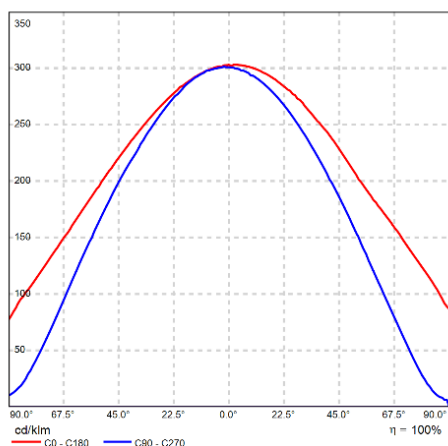

Linear LDC

PRODUCTTYPE	POWER	LIGHT COLOR	OPTIONAL	OPTIONAL
<b>EE- TPS</b>	<b>40</b>	<b>40</b>	<b>EM</b>	<b>DA</b>
TRI PROOF	40 Watt	3000/4000 K	EMERGENCY UNIT	DALI

SUMMARY PRODUCTCODES TPS40:

- EE-TPS40-30                      EE-TPS40-40
- EE-TPS40-30-EM                EE-TPS40-40-EM
- EE-TPS40-30-DA                EE-TPS40-40-EM
- EE-TPS40-30-EM-DA            EE-TPS40-40-EM

