


PLXU

EE-PLXU60Q4/45



45W

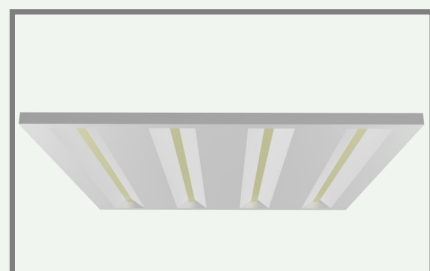

3000/  
4000K



5422 lm



110°



Optional  
dimmable

TECHNICAL FEATURES



|                 |                               |
|-----------------|-------------------------------|
| Power           | 45W                           |
| Input current   | 220-240 Vac                   |
| Dimmable        | Optional triac / dali / 0-10V |
| IP rating       | 20                            |
| Max. amb. Temp. | 40°C                          |


LIGHTING CHARACTERISTICS

|              |             |
|--------------|-------------|
| Light color  | 3000/4000 K |
| CRI          | RA80+       |
| Lumen output | 5422 lm     |
| UGR          | <13         |
| LED-type     | SMD2835     |

MEASUREMENTS AND MATERIAL FEATURES

|              |              |
|--------------|--------------|
| Measurements | 595 x 595 mm |
| Material     | aluminium    |
| Color        | white        |

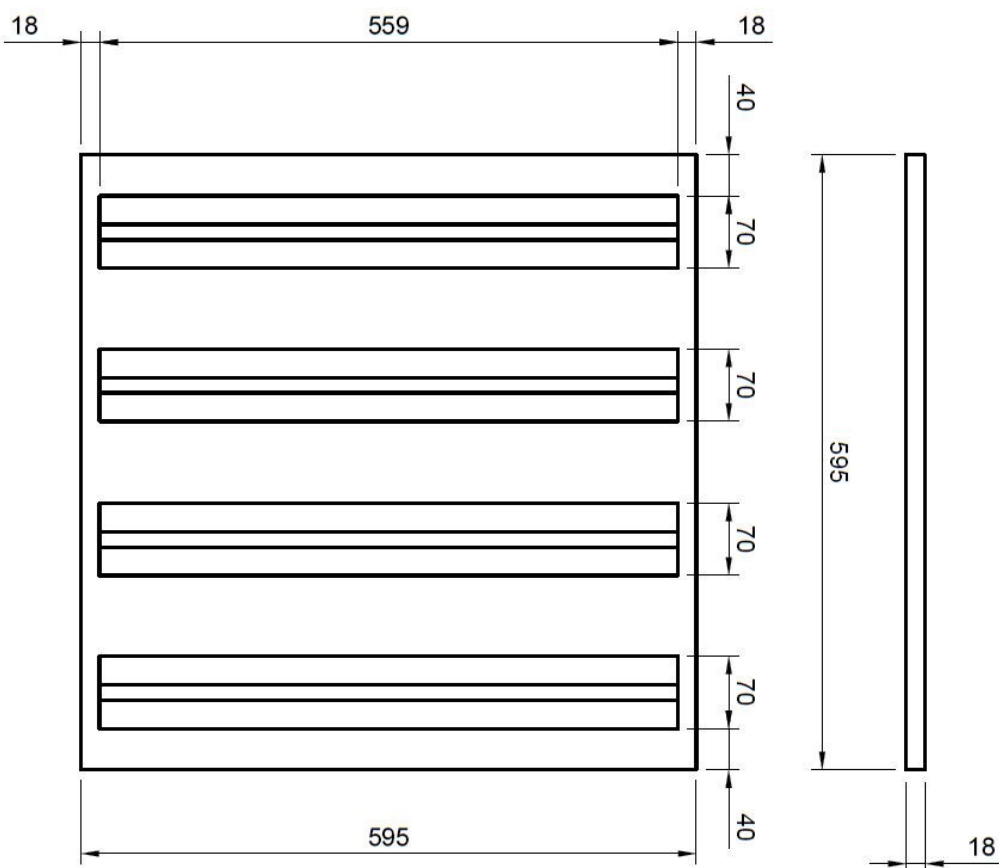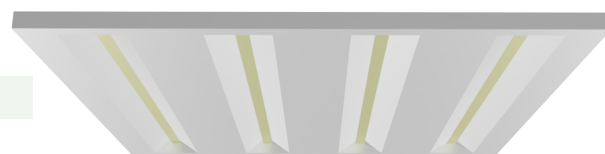

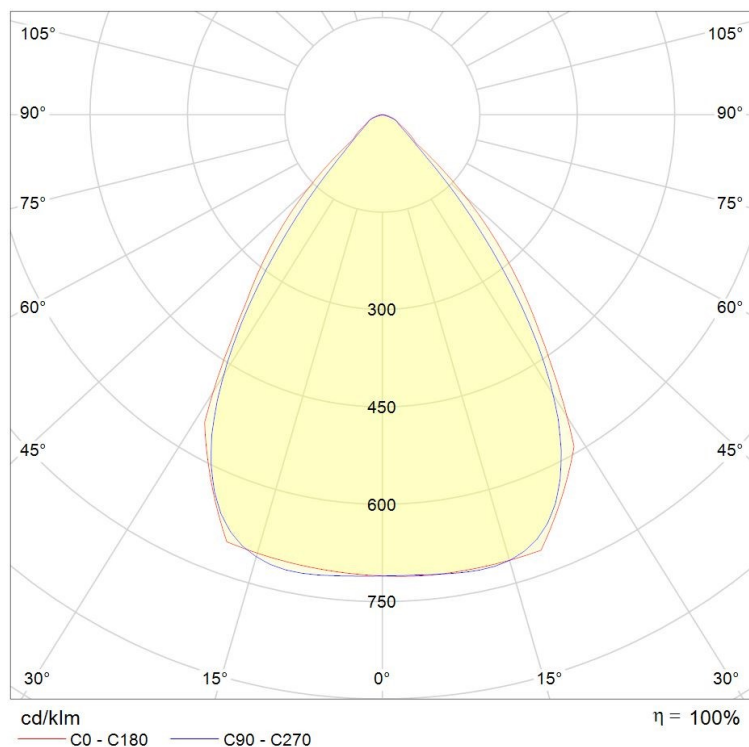

**PLXU 60Q4**

| PRODUCTTYPE                     | DIMENSIONS                   | POWER   | LIGHT COLOR |
|---------------------------------|------------------------------|---------|-------------|
| <b>EE- PLXU 60 Q4 / 45 - 30</b> |                              |         |             |
| PANEL LIGHT                     | 59,5 x 59,5 cm<br>4 LEDlines | 45 Watt | 3000 K      |

EE-PLXU60Q4/45-30-0-10V 60x60 tegel, 4 led-lijnen, 45W 3000K, 0-10V  
 EE-PLXU60Q4/45-40-0-10V 60x60 tegel, 4 led-lijnen, 45W 4000K, 0-10V

EE-CPL-SMK opbouwkader  
 EE-CPLSUSP-KIT suspensiekit  
 EE-PLXU-NU optie nood