


PLXU

EE-PLXU60Q4/60



60W

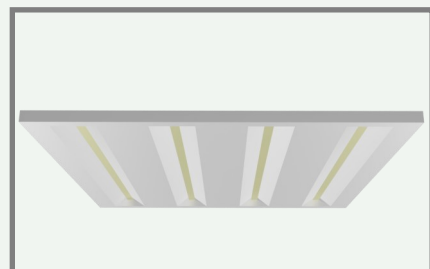

3000/  
4000K



7230 lm



110°



Optional  
dimmable

TECHNICAL FEATURES


Power	60W
Input current	220-240 Vac
Dimmable	Optional triac / dali / 0-10V
IP rating	20
Max. amb. Temp.	40°C


LIGHTING CHARACTERISTICS

Light color	3000/4000 K
CRI	RA80+
Lumen output	7230 lm
UGR	<13
LED-type	SMD2835

MEASUREMENTS AND MATERIAL FEATURES

Measurements	595 x 595 mm
Material	aluminium
Color	white

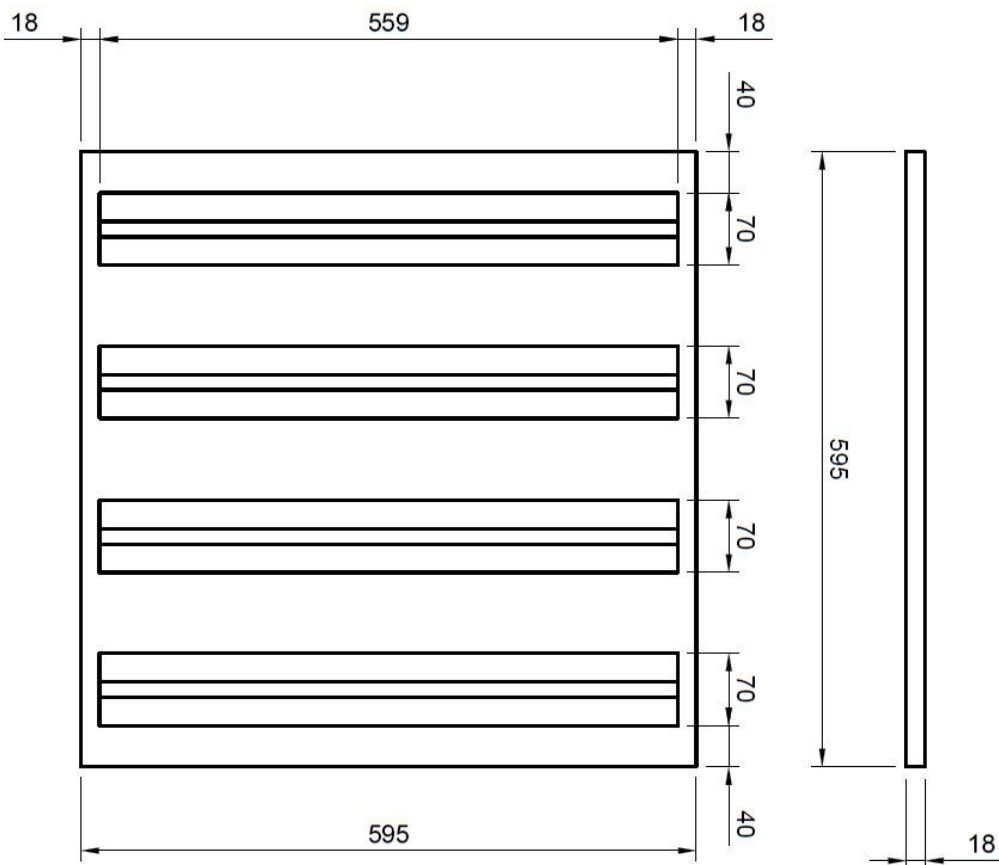

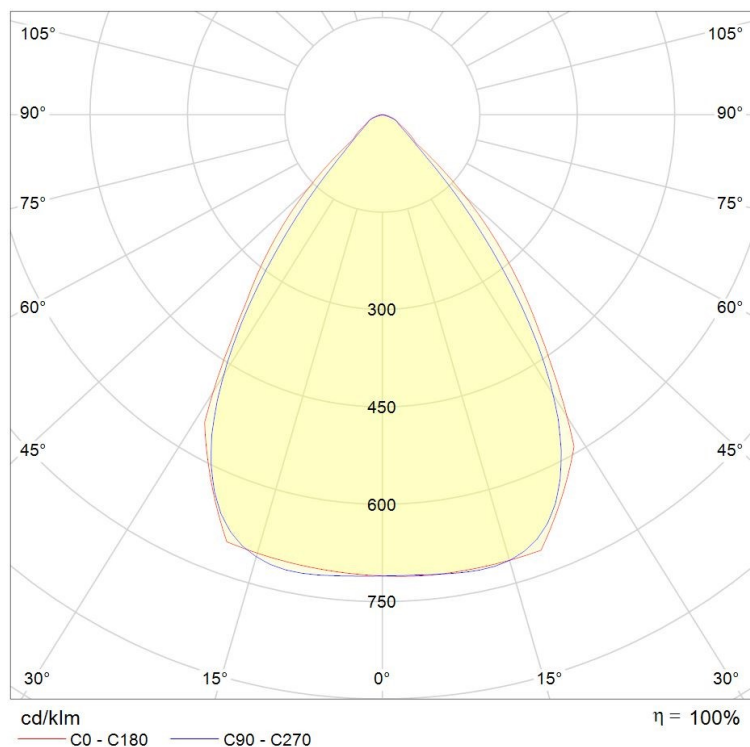

PLXU 60Q4

PRODUCTTYPE	DIMENSIONS	POWER	LIGHT COLOR
<b>EE- PLXU</b>	<b>60 Q4 /</b>	<b>60</b>	<b>- 30</b>
PANEL LIGHT	59,5 x 59,5 cm 4 LEDlines	60 Watt	3000 K

EE-PLXU60Q4/60-30-0-10V 60x60 tegel, 4 led-lijnen, 60W 3000K, 0-10V

EE-PLXU60Q4/60-40-0-10V 60x60 tegel, 4 led-lijnen, 60W 4000K, 0-10V

EE-CPL-SMK opbouwkader

EE-CPLSUSP-KIT suspensiekit

EE-PLXU-NU optie nood