


PLXU

EE-PLXU 120Q2/36



36W

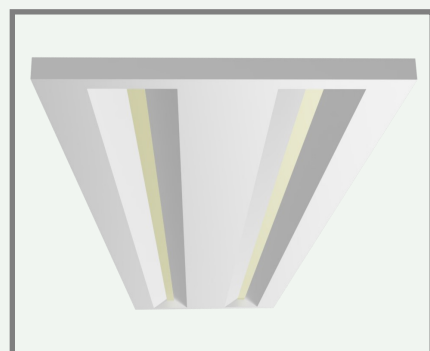

3000/
4000K



4338 lm



110°



Optional
dimmable

TECHNICAL FEATURES


| | |
|-----------------|-------------------------------|
| Power | 36W |
| Input current | 220-240 Vac |
| Dimmable | Optional triac / dali / 0-10V |
| IP rating | 20 |
| Max. amb. Temp. | 40°C |


LIGHTING CHARACTERISTICS

| | |
|--------------|-------------|
| Light color | 3000/4000 K |
| CRI | RA80+ |
| Lumen output | 4338 lm |
| UGR | <13 |
| LED-type | SMD2835 |

MEASUREMENTS AND MATERIAL FEATURES

| | |
|--------------|---------------|
| Measurements | 295 x 1195 mm |
| Material | aluminium |
| Color | white |

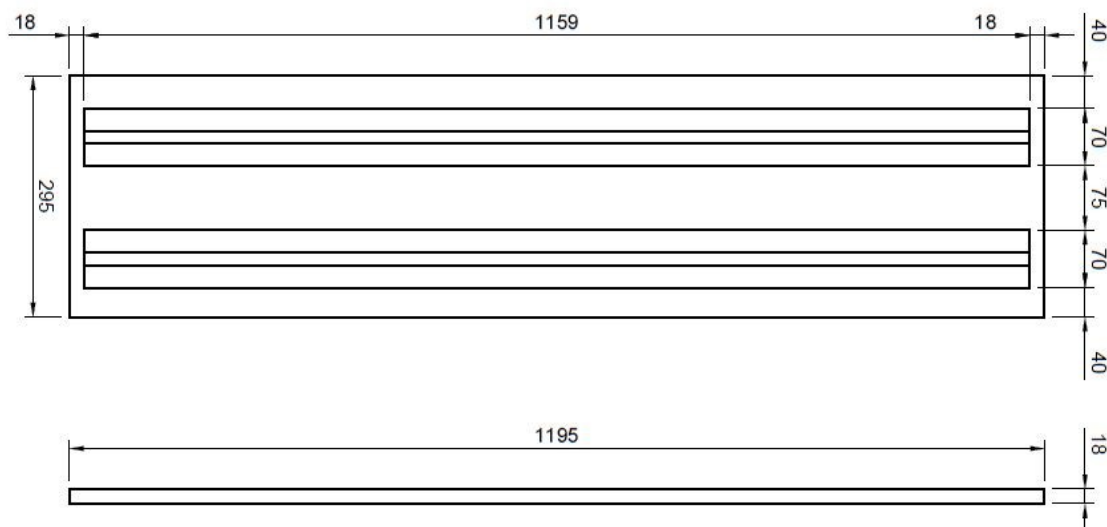

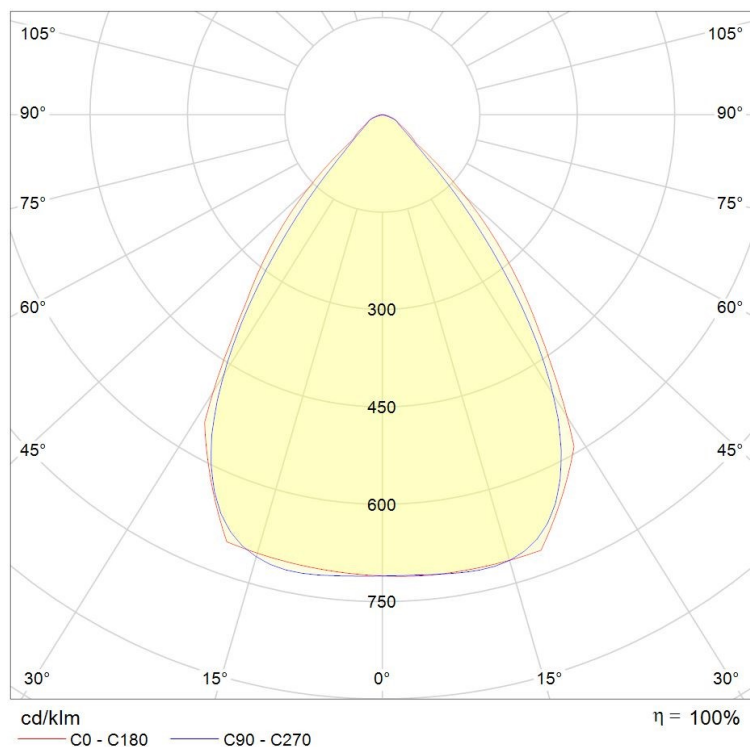

PLXU 120Q2

| PRODUCTTYPE | DIMENSIONS | POWER | LIGHT COLOR |
|-----------------|----------------------------|-----------|-------------|
| EE- PLXU | 120 Q2 / | 36 | - 30 |
| PANEL LIGHT | 29,5 x 119,5 cm 2 LEDlines | 36 Watt | 3000 K |

EE-PLXU120Q2/36-30-0-10V 120x60 tegel, 2 led-lijnen, 36W 3000K, 0-10V

EE-PLXU120Q2/36-40-0-10V 120x60 tegel, 2 led-lijnen, 36W 4000K, 0-10V

EE-CPL-SMK opbouwkader

EE-CPLSUSP-KIT suspensiekit

EE-PLXU-NU optie nood