

CPL

EE-CPL 120/36



36W



3000/
4000K



4100/
4200 lm



Dimmable
DALI

TECHNICAL FEATURES

Power	36 W
Input current	220-240 V
Dimmable	Optional Dali
IP rating	20
Max. amb. Temp.	50°C
Sensor	Optional


LIGHTING CHARACTERISTICS


Light color	3000/4000 K
CRI	RA80+
Lumen output	4100/4200 lm
UGR	<19
Lifetime	L80B10 50000h
SDCM	3

MEASUREMENTS AND MATERIAL FEATURES

Measurements	1195 x 295 mm
Material	Aluminium, PMMA cover
Color	white

Framework available

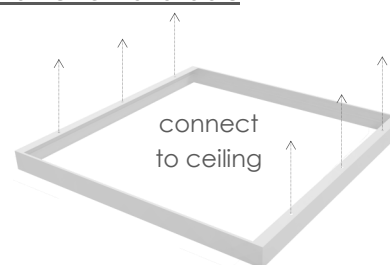

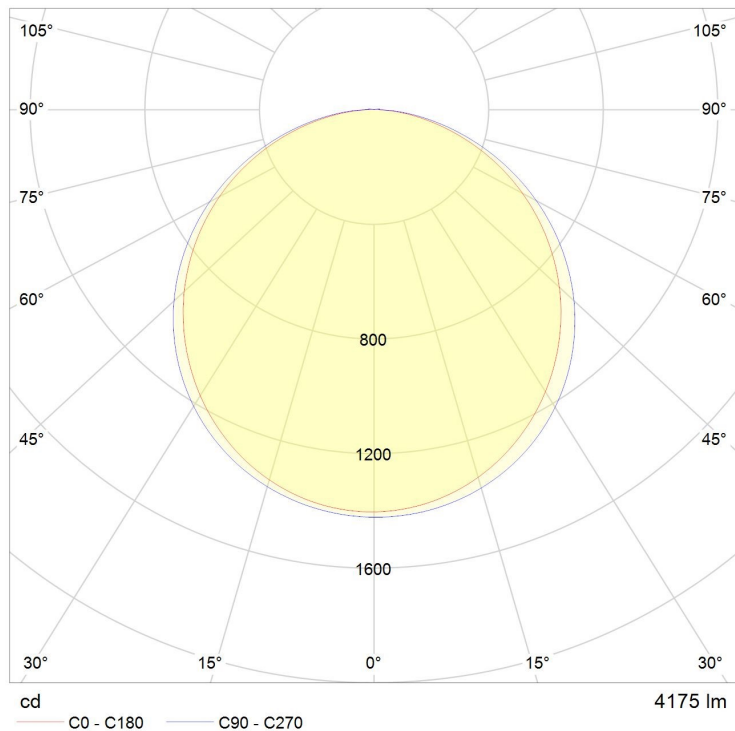

CPL120/36

PRODUCTTYPE	DIMENSION	POWER	LIGHT COLOR
EE-	CPL 120 /	36 -	30
PANEL LIGHT	1195 x 295mm	WATT	KELVIN

EE-CPL120/36-30

120x30 tegel, lichtvlak, 36W, 3000K

EE-CPL120/36-40

120x30 tegel, lichtvlak, 36W, 4000K

EE-CPL120/36-30-DA

120x30 tegel, lichtvlak, 36W, 3000K, 0-10V

EE-CPL120/36-40-DA

120x30 tegel, lichtvlak, 36W, 4000K, 0-10V

EE-CPL120/36-30-0-10V

120x30 tegel, lichtvlak, 36W, 3000K, 0-10V

EE-CPL120/36-40-0-10V

120x30 tegel, lichtvlak, 36W, 4000K, 0-10V

EE-CPL-SMK

opbouwkader

EE-CPLSUSP-KIT

suspensiekit

EE-CPL-NU

optie nood