

16W/m



2400K-
6000K



101-120
lm/W



120°



Dimmable
PWM

TECHNICAL FEATURES

Power	16W/m
Input current	24 Vdc
Dimmable	PWM
IP rating	20/67
Max. amb. Temp.	-20°C up to +40°C


MEASUREMENTS AND MATERIAL FEATURES


Measurements	10 x 3 x 5000 mm
Cutable every...	2,5 cm (6 LED's)

LIGHTING CHARACTERISTICS

Light color	2400/2700/3000/4000/6000
Beam angle	120°
CRI	RA95+
Lumen output	2400K: 101 lm/W
	2700K: 105 lm/W
	3000K: 107 lm/W
	4000K: 113 lm/W
	6000K: 120 lm/W

LED's/m	240
LEDtype	3528

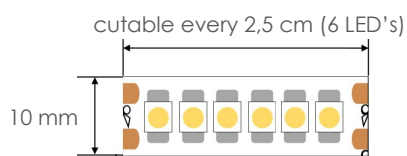

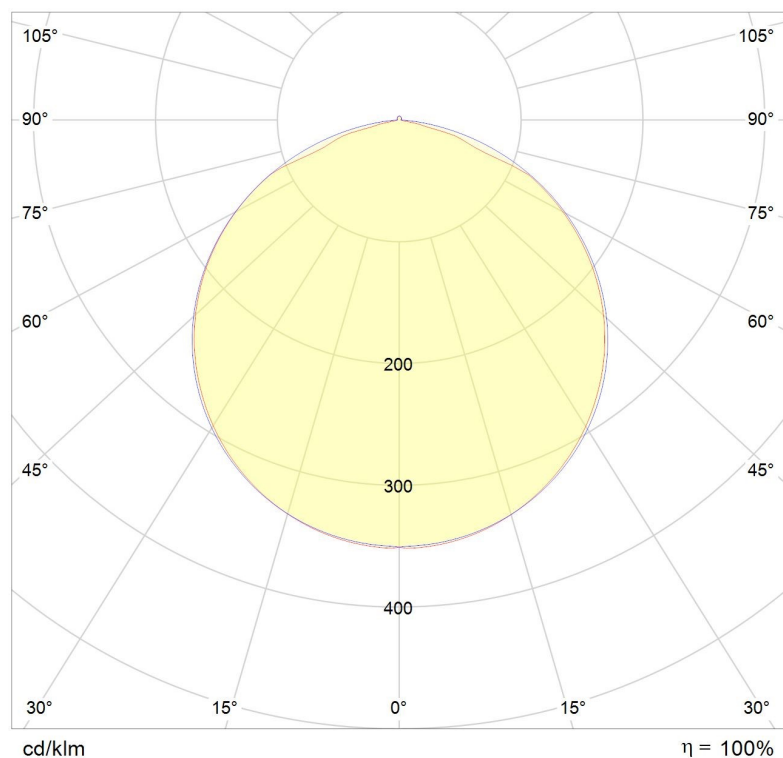

cd/klm
— C0 - C180 — C90 - C270

η = 100%

FS16

PRODUCTTYPE	POWER	LIGHT COLOR	IP
EE - FS	16	/ 24	NWP
FLEXIBLE STRIP	WATT/M	KELVIN	NWP nanowaterproof

SUMMARY PRODUCTCODES LEDSTRIP 16 WATT

- EE-FS16/24
- EE-FS16/24NWP
- EE-FS16/27
- EE-FS16/27NWP
- EE-FS16/30
- EE-FS16/30NWP
- EE-FS16/40
- EE-FS16/40NWP
- EE-FS16/60
- EE-FS16/60NWP

