

24W/m



2400K-  
6000K



105-120  
lm/W



120°



Dimmable  
PWM

**TECHNICAL FEATURES**


Power	24W/m
Input current	24 Vdc
Dimmable	PWM
IP rating	20/67
Max. amb. Temp.	-20°C up to +40°C


**LIGHTING CHARACTERISTICS**

Light color	2400/2700/3000/4000/6000
Beam angle	120°
CRI	RA95+
Lumen output	2400K: 105 lm/W
	2700K: 109 lm/W
	3000K: 110 lm/W
	4000K: 115 lm/W
	6000K: 120 lm/W

**MEASUREMENTS AND MATERIAL FEATURES**

Measurements	8 x 3 x 5000 mm	LED's/m	240
Cutable every...	5 cm (6 LED's)	LEDtype	2835

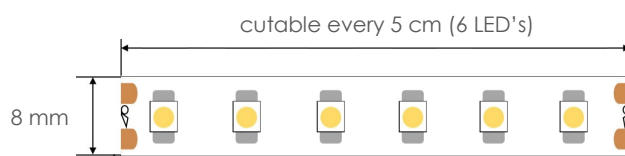

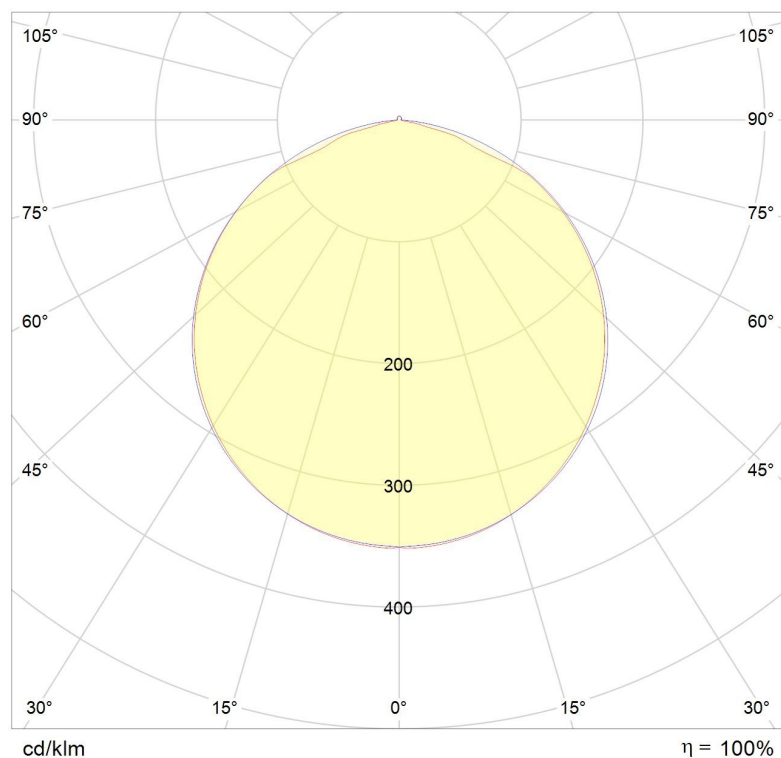

cd/klm  
— C0 - C180 — C90 - C270

$\eta = 100\%$

FS24

PRODUCTTYPE	POWER	LIGHT COLOR	IP
EE - FS	24	/ 24	NWP
FLEXIBLE STRIP	WATT/M	KELVIN	NWP nanowaterproof

SUMMARY PRODUCTCODES LEDSTRIP 24 WATT

- EE-FS24/24
- EE-FS24/24NWP
- EE-FS24/27
- EE-FS24/27NWP
- EE-FS24/30
- EE-FS24/30NWP
- EE-FS24/40
- EE-FS24/40NWP
- EE-FS24/60
- EE-FS24/60NWP

