



LEDSTRIP

High Output EE-HOFS12

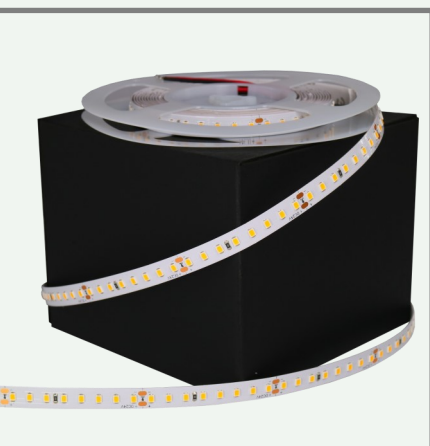

12W/m

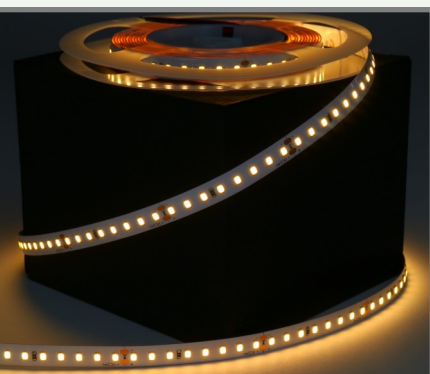

2700K-
4000K



146-154
lm/W



120°



Dimmable
PWM

TECHNICAL FEATURES

| | |
|-----------------|-------------------|
| Power | 12W/m |
| Input current | 24 Vdc |
| Dimmable | PWM |
| IP rating | 20/67 |
| Max. amb. Temp. | -20°C up to +40°C |


LIGHTING CHARACTERISTICS

| | |
|--------------|-----------------|
| Light color | 2700/3000/4000 |
| Beam angle | 120° |
| CRI | RA80+ |
| Lumen output | 2700K: 146 lm/W |
| | 3000K: 149 lm/W |
| | 4000K: 154 lm/W |


MEASUREMENTS AND MATERIAL FEATURES

| | |
|------------------|------------------|
| Measurements | 10 x 3 x 5000 mm |
| Cutable every... | 10 cm (8 LED's) |

| | |
|---------|------|
| LED's/m | 80 |
| LEDtype | 2835 |

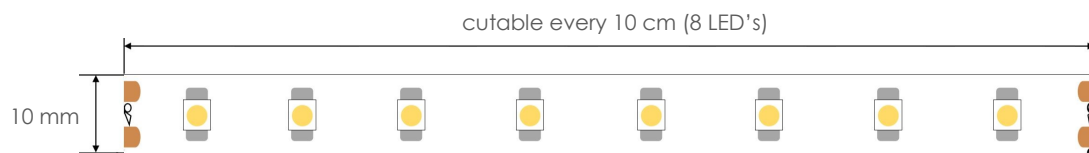

LEDSTRIP High Output EE-HOFS12

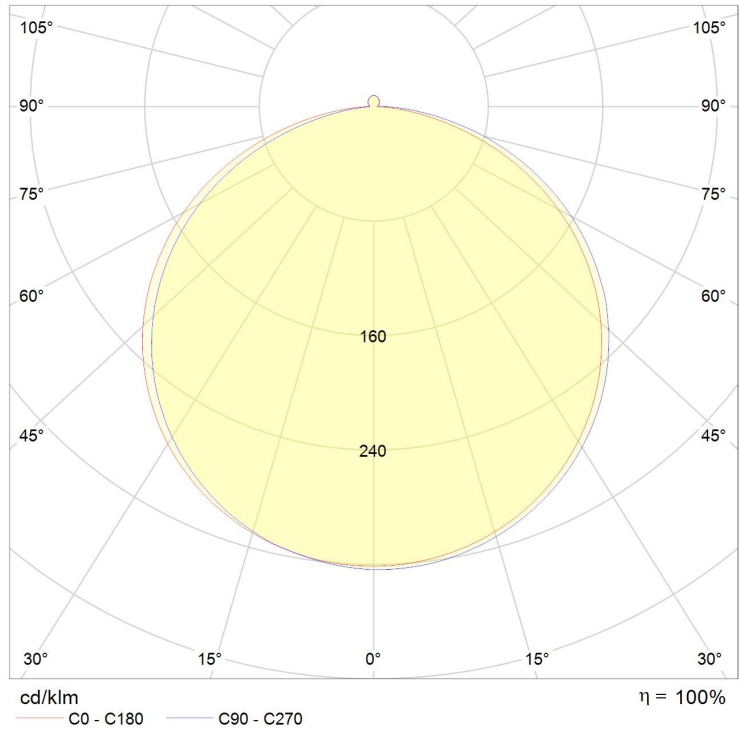

HOFS12

| PRODUCTTYPE | | POWER | LIGHT COLOR | | |
|----------------------------|---------------|-----------|-------------|-------------|------------------|
| EE | - HOFS | 12 | / | 27 - | 5 N |
| HIGH OUTPUT FLEXIBLE STRIP | | WATT/M | | KELVIN | m Nanowaterproof |

SUMMARY PRODUCTCODES LEDSTRIP HIGH OUTPUT 12 WATT/M

- EE-HOFS12/27 EE-HOFS12/27-5N
- EE-HOFS12/30 EE-HOFS12/30-5N
- EE-HOFS12/40 EE-HOFS12/40-5N

