

5W/m



2400K-
6000K



78-96
lm/W



120°



Dimmable
PWM

TECHNICAL FEATURES

Power	5W/m
Input current	24 Vdc
Dimmable	PWM
IP rating	20/65/67
Max. amb. Temp.	-20°C up to +40°C


LIGHTING CHARACTERISTICS


Light color	2400/2700/3000/4000/6000
Beam angle	120°
CRI	RA95+
Lumen output	2400K: 78 lm/W
	2700K: 82 lm/W
	3000K: 84 lm/W
	4000K: 91 lm/W
	6000K: 96 lm/W

MEASUREMENTS AND MATERIAL FEATURES

Measurements	8 x 3 x 5000 mm
Cutable every...	10 cm (6 LED's)

LED's/m	60
LEDtype	3528
Lifetime	L90B10 50000h
SDCM	<3

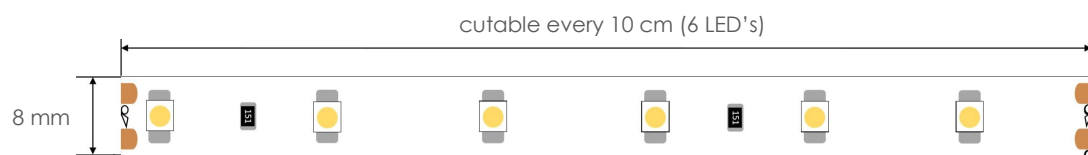

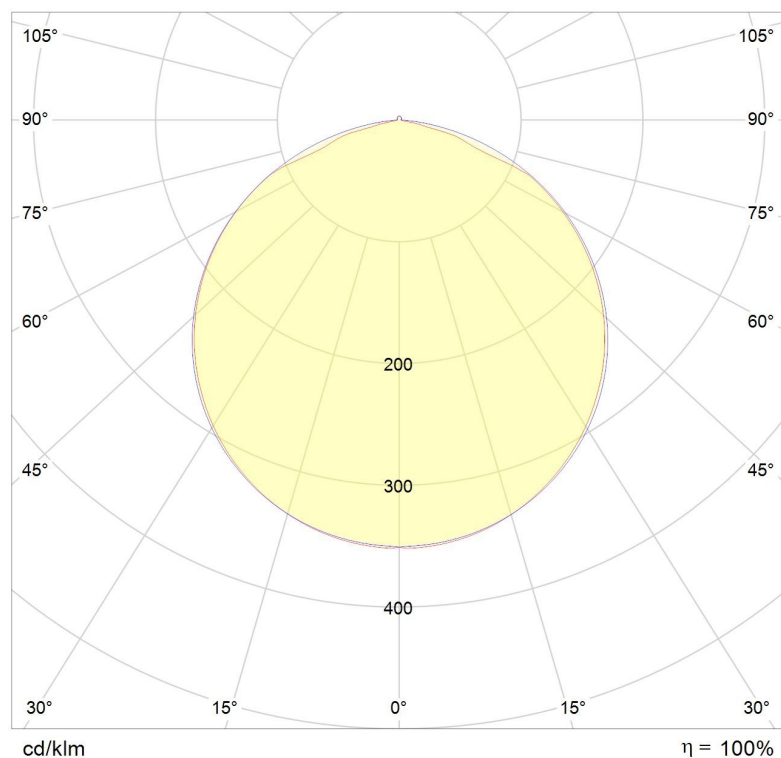

cd/klm
— C0 - C180 — C90 - C270

$\eta = 100\%$

FS05

PRODUCTTYPE	POWER	LIGHT COLOR	IP
EE - FS	05	/ 24	NWP
FLEXIBLE STRIP	WATT/M	KELVIN	WP waterproof NWP nanowaterproof

SUMMARY PRODUCTCODES LEDSTRIP 5 WATT

- | | |
|---------------|---------------|
| EE-FS05/24 | EE-FS05/40 |
| EE-FS05/24WP | EE-FS05/40WP |
| EE-FS05/24NWP | EE-FS05/40NWP |
| EE-FS05/27 | EE-FS05/60 |
| EE-FS05/27WP | EE-FS05/60WP |
| EE-FS05/27NWP | EE-FS05/60NWP |
| EE-FS05/30 | |
| EE-FS05/30WP | |
| EE-FS05/30NWP | |